

CSE GROUP

<http://www.csee.com.tw>

Head office

TAIWAN

CSE. CHIANG SUNG ENTERPRISE CO., LTD.

No.65, Sheng Kung 1 St Rd. Pei Tou, Industrial Park, Changhua, Taiwan
TEL: +886-4-8876919(Rep) FAX: +886-4-8876918
E-mail: csee@ms57.hinet.net

THAILAND

CSE TECHNOLOGIES CO., LTD.

Factory:

39,39/1 moo 7 Petkaseam Rd, Nongchumpon, Khaoyoy,
Petchaburi, Thailand 76140
Tel: +66-327-96234, +66-327-96225~6 Fax: +66-327-96247

Office:

Tel: +66-24158051-3 Fax: +66-24158059
E-mail: sales@csetechnologies.co.th

CHINA

FUJIAN CHIANG SHIN HARDWARE MACHINERY CO.,LTD.

Xing Tai Industrial Zone RC Chang Tai Zhang Zhou Fujian
TEL: +86-596-8310856 FAX: +86-596-8310866



CSE BPE

Pharmaceutical / Biotechnology
Control Equipment




Worldwide service:

Taiwan | New York | India | Thailand | Xiamen | Shanghai | France



1142

ASME BPE CERTIFIED QUALITY

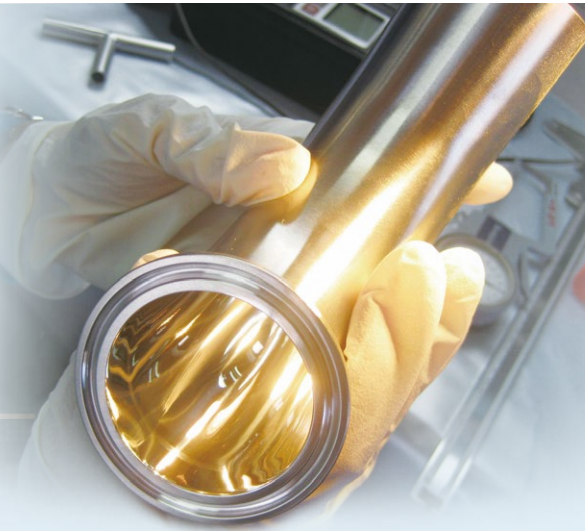

The American Society of Mechanical Engineers



CERTIFICATE OF AUTHORIZATION

The named company is authorized by The American Society of Mechanical Engineers (ASME) for the scope shown below in accordance with the applicable rules of the ASME BPE Standard on Bioprocessing Equipment. The use of the ASME Single Certification Mark and the authority granted by this Certificate of Authorization are subject to the provisions of the agreement set forth in the application. Any component certified under this authorization shall have been produced, assembled, and tested in accordance with the provisions of the ASME BPE Standard on Bioprocessing Equipment.

COMPANY:

CSE. Chiang Sung Enterprise Co., Ltd.
CSE Technologies Co., Ltd.
39, 39/1 & 39/2 MOO 7 NONGCHUMPON KHAOYOY
PETCHABURI 76140
Thailand




SCOPE:

**Manufacture of ferrous tubing (excluding circumferential welds)
and fittings, at the above location only**

AUTHORIZED: **August 23, 2023**
EXPIRES: **August 23, 2028**
CERTIFICATE NUMBER: **BPE-122**

Ruth B. Caplan
Board Chair, Conformity Assessment

LM Zsinberg
Managing Director, Standards & Engineering Services

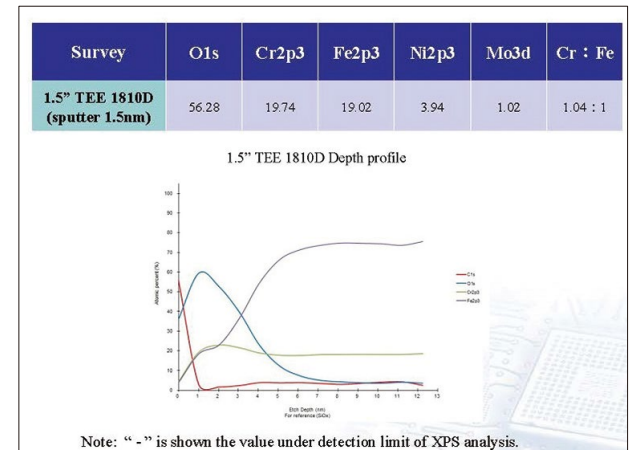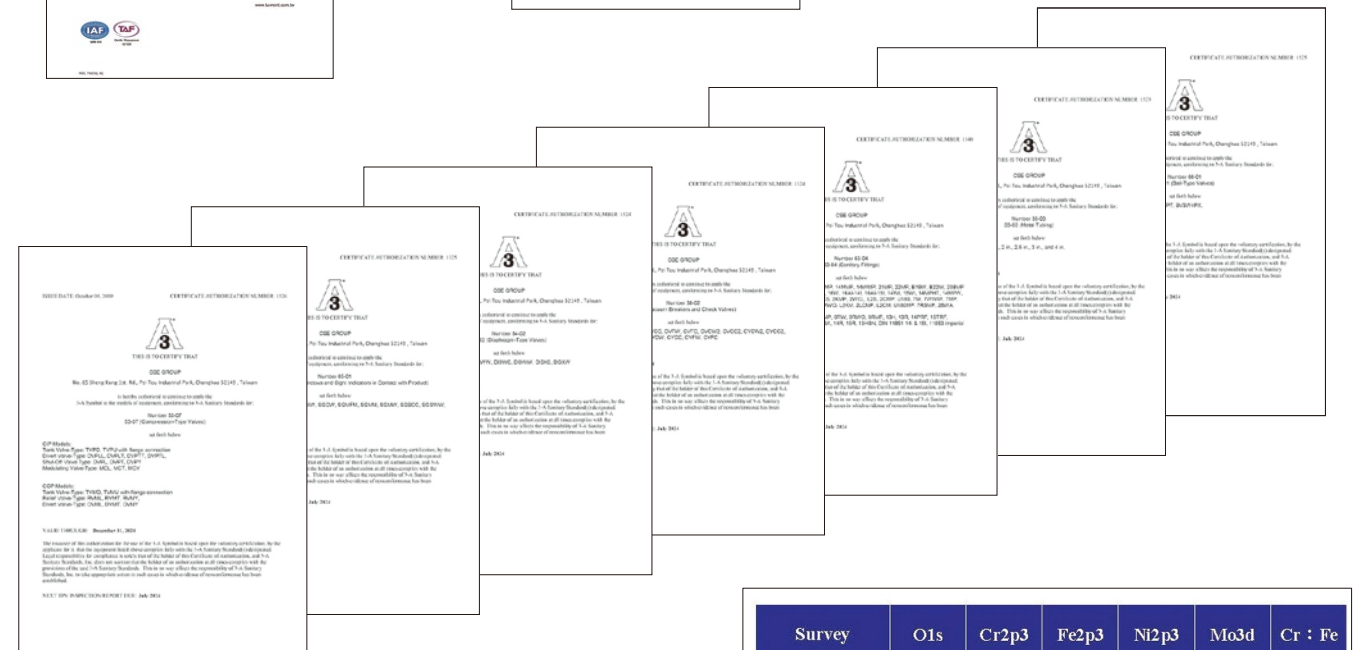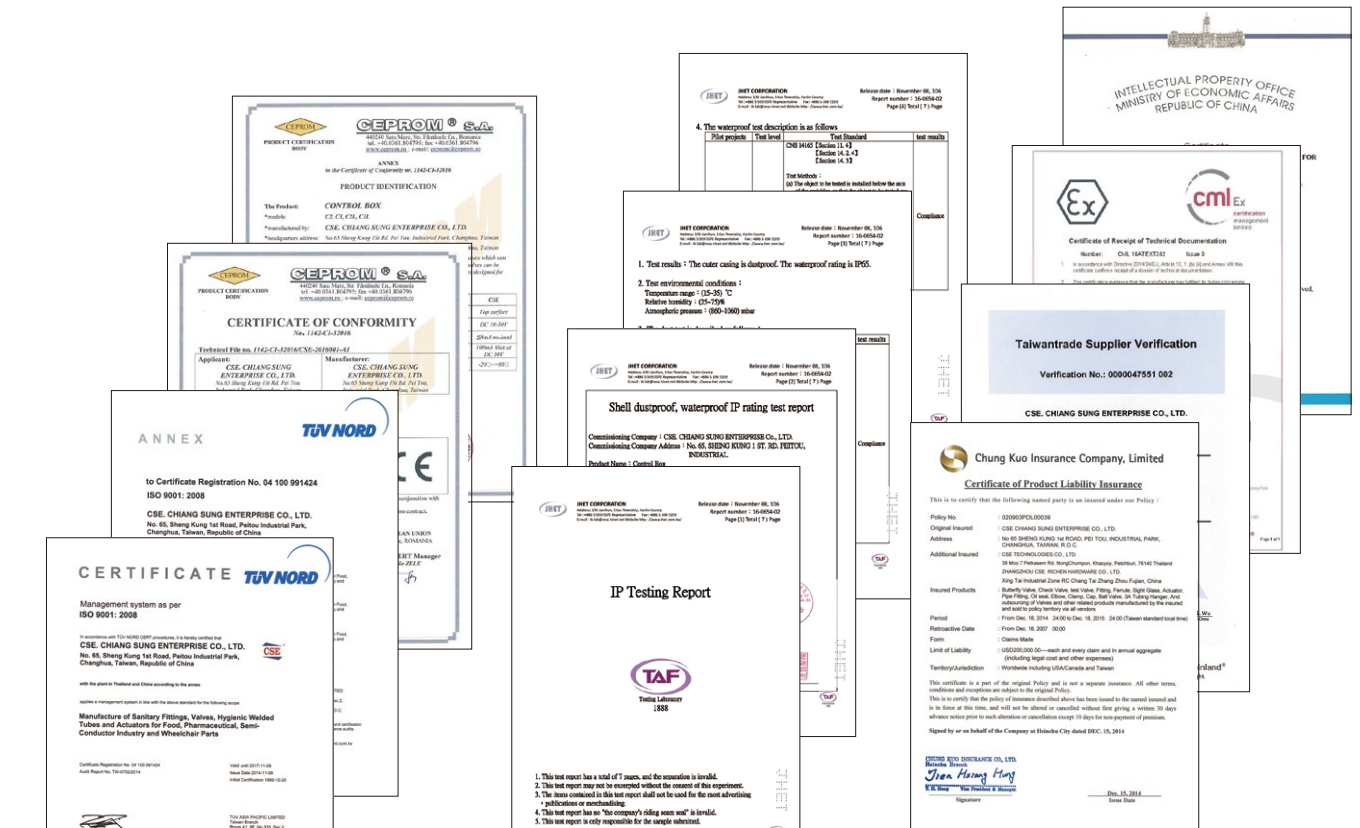


**C.S.E. is certified by 3A and TÜV ISO 9001
with EN10204 3.1
material cert. will be your assurance of
outstanding quality & service.**

About CSE Group

CSE Group

CSE own the international advanced production line and testing equipment, we focus on the quality control and devoted our professional engineers, skilled workforce into the each requirement from customers. CSE always put the demand of customer in our first consideration and keep on pursuing the promotion and innovation of the products. Therefore we enjoy in growing up with our customer to create the win-win situation.

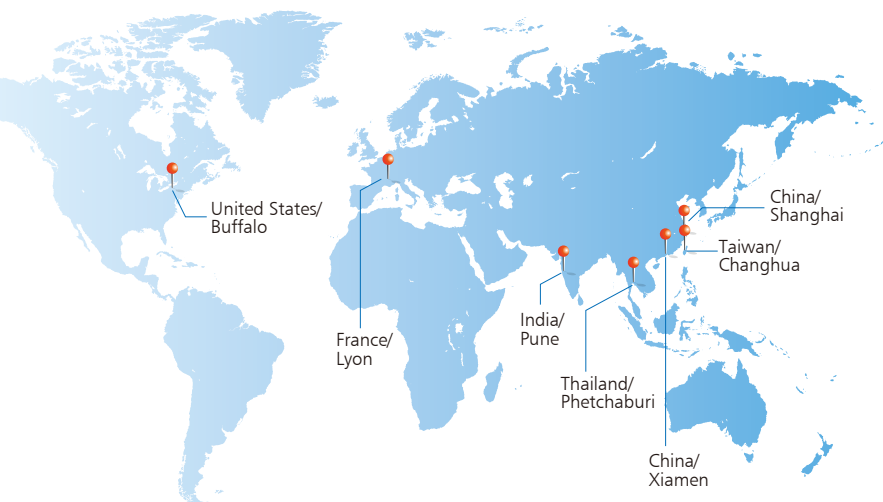

Maximum Cleanability

CSE fittings are cleaned using a multiple step process to assure clean surface, areas inside and out with repeatability every time. Every fitting is passivated according to ASME BPE and ASTM A967 standards.

Full Traceability

We provide full traceability for each of our products by supplying all necessary production process data. Starting from certifications and incoming inspection of raw materials, through in-process quality control, final inspection, marking and packaging. The process is also completely documented with a unique job number for each BPE process component.

Every Fitting is Quality Inspected

All around quality and meticulous inspection insures that every fitting will be of the highest quality and in total compliance with all ASME-BPE standards. CSE fittings are 100% visual inspected.

BPE Control Process of Tube & Fitting



BPE Control Process of Aseptic BPE Valve



Index

BPE Specialized Technology

ASME BPE surface Standard
The different of EP & MP
Mechanical Polishing (MP) & Electro-Polishing (EP)
Fittings Specifications
Professional technical equipment and production
Precision and strict quality control process



Page **06 - 13**

BPE Auto / Manual Control Valves

Pneumatic/Manual Diaphragm Valve 2WAY
Tank Bottom Valve
Tank Bottom Valve (Pneumatic/Manual)
Construction Summarization
Pneumatic/Manual Diaphragm Valve T-TYPE 3WAY
Pneumatic/Manual Diaphragm Valve 3WAY/U-Bend Valve
Multi-port Diaphragm Valve
Block Diaphragm Valve



Page **14 - 24**

CSE Hygienic Sample Valve for BPE

Hygienic Sample Valve for BPE
CSE Sample Cock Valve
CSE Diaphragm Sample Valve



Page **25 - 27**

Auto Control Valve & Manual Control Valve



Page **28**

CSE Hygienic Filter & OEM for BPE


Bellow Sterile Valves
CSE STRAINERS
Sanitary Standard Pressure Gauge



Page **29 - 32**

BPE Pharmaceutical/Biotechnology Fitting & Tube

CSE HIGH PURITY TUBE & FITTING VALVE (ASME BPE STANDARD)
BPE Stainless Steel Tubing
Marking
BPE Fittings
Heavy Duty Clamp-Ring
Ferrule Seal



Page **33 - 54**

ASME BPE surface Standard

The weld beads shown in the above photographs are the weld beads on the I.D. of the tubing. The area for comparison in each photograph is the area inside the red circle. Welds and heat-affected zones on electropolished UNS S31603 tubing with discoloration levels no worse than Samples #1 through #4 in the as-welded condition are acceptable. Discoloration levels more severe than that shown in Sample #4 are unacceptable. Sample #5 shows unacceptable discoloration levels for comparison. The user is cautioned that the colors observed during direct visual examination or borescope examination will be different viewing directly down (90 deg) at the surface compared with viewing at a lower angle along the edges.

GENERAL NOTE: The user is cautioned that electronic versions or photocopies of these acceptance criteria shall not be used for evaluation of sample or production welds since subtle differences in color can influence weld acceptability.


Table SF-2.2-2
Additional Acceptance Criteria for Electropolished
Metallic Process Contact Surface Finishes

Anomaly or Indication	Acceptance Criteria
Cloudiness	Acceptable if R_a max. is met
End grain effect	Acceptable if R_a max. is met
Fixture marks	Acceptable if electropolished
Haze	Acceptable if R_a max. is met
Interrupted electropolish	Acceptable if R_a max. is met
Orange peel	Acceptable if R_a max. is met
Stringer indication	Acceptable if R_a max. is met
Weld whitening	Acceptable if R_a max. is met
Variance in luster	Acceptable if R_a max. is met

ASME BPE-2022

Figure MJ-8.4-2

Discoloration Acceptance Criteria for welds and heat-affected zones on electropolished UNS S31603 Tubing

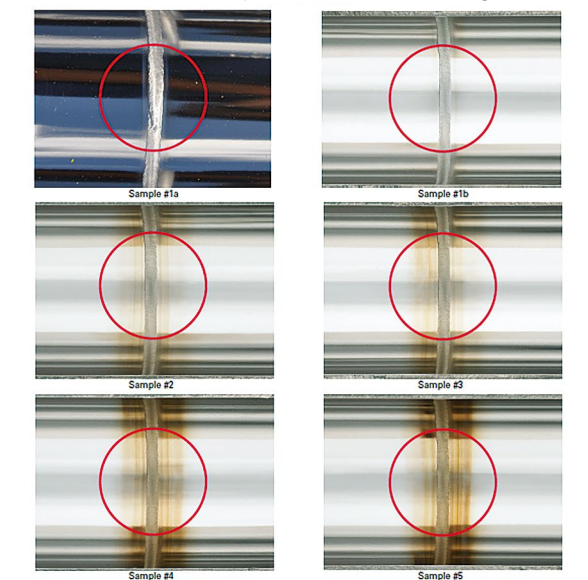

The weld beads shown in the above photographs are the weld beads on the I.D. of the tubing. The area for comparison in each photograph is the area inside the red circle. Welds and heat-affected zones on electropolished UNS S31603 tubing with discoloration levels no worse than Samples #1 through #4 in the as-welded condition are acceptable. Discoloration levels more severe than that shown in Sample #4 are unacceptable. Sample #5 shows unacceptable discoloration levels for comparison. The user is cautioned that the colors observed during direct visual examination or borescope examination will be different viewing directly down (90 deg) at the surface compared with viewing at a lower angle along the edges.

GENERAL NOTE: The user is cautioned that electronic versions or photocopies of these acceptance criteria shall not be used for evaluation of sample or production welds since subtle differences in color can influence weld acceptability. Nonmandatory Appendix B explains the technique by which these acceptance criteria were determined.

This figure is also available as a stand-alone document from ASME as ASME BPE-EP.

263

Austenitic Alloy Nominal Compositions

Standard	Material	Equal	Family	C	Mn	Si	P	S	Ni		Cr		Mo	
				Max	Max	Max	Max	Max	Min	Max	Min	Max	Min	Max
AISI	316L			0.03	2	1	0.045	0.030	10	14	16	18	2	3
EN	1.4404	316L		0.03	2	1	0.045	0.015	10	14.5	16.5	18.5	2	2.5
EN	1.4435	316L		0.03	2	1	0.045	0.030	12.5	15	17	19	2.5	3
ASME BPE	316L		Pharma	0.03	2	0.75	0.040	0.005-0.017	10	15	16	18	2	3

Hastelloy Corrosion-resistant alloys: Alloy Nominal Compositions

Alloy	Nia	Co	Fe	Cr	Mo	W	Mn	Si	Cb	V	Al	Ti	C	Cu	Others
C-22®	56	2.5*	3	22	13	3	0.5*	0.08*	-	0.35*	-	-	0.01*	0.5*	-
AL-6XN	23.5-25.5	0.75		20-22	6-7		2	1					0.03	0.75	s<0.03
C-276	57	2.5*	5	16	16	4	1*	0.08*	-	0.35*	-	-	0.01*	0.5*	-



CSE Standard ASME BPE product labels



Scan the QR Code,
available to search the
MTR (material certificate)
by mobile or online

CSE Mill certificate for Tube

CSE MATERIAL TEST REPORT
For Seamless/Welded Tubes According to EN 10204/3.1
CSE CHIANG SUNG ENTERPRISE CO., LTD.
TEL: +66-32-796234 FAX: +66-32-796247
39, 39/1 MOO 7, NongChumpon Khaooy Petchaburi 76140 Thailand
e-mail: csee@ms57.hinet.net http://www.csee.com.tw

Customer: _____

MTR No. _____
Invoice No. _____
Date cert: _____
Customer PS No.: N/A
QA Manual No.: QM-01-01 Rev.4 (2022-02-24)

Customer Order: _____
Specifications: ASME BPE 2019
ASTM A270-15 LOT NO.: 21340001

ITEM No.	Material Type	Heat No.	Product Type Sizes & Dimensions	Quantity	Total Meters
1	TP316L	YU199198	10010-029X1.5-41-H40 D11866-A A270-S2 Auto Welded Tube L=6.1M SF4 ID EP Finished Ra<0.38µm/ OD Pol. Ra<0.8µm DN25 29*1.5	100	610

Chemical analysis WT% (According to: ASTM A240/A 240M)									Mechanical Feature (According to: ASTM A270/A270-15)						
Chemical Composition %	C	Si	Mn	P	S	Ni	Cr	Mo	Yield Strength (MPa)	Tensile Strength (MPa)	Flattening Test	Elongation %	Hardness (HRB)	Solution Heat Treatment °C/HWQ	
Requirements:	MAX	0.035	1.000	2.000	0.045	0.030	14.00	18.00	3.00						
Item No:	MIN														
1		0.020	0.520	0.640	0.0330	0.0010	10.100	16.720	2.05	290	610	Acceptable	55	79	1040

Process Testing	Test Result	Other Analysis And Inspection	Test Result
Reverse Flattening Test:	Acceptable	Visual & Dimensional Test	Acceptable
Reverse Bend Test:	Acceptable	Material & Identification Test	Acceptable
Eddy Current Test:	Acceptable	Weld decay test	Acceptable
Flange Test:	Acceptable	Intergranular corrosion test	Acceptable
Flattening Test:	Acceptable	Ra Max Value (ID / OD)	Acceptable

ATTEST:
The material producer has certified that this material has been manufactured, samples, tested, and inspected in accordance with the specification, including year date and supplementary requirements, and that the results meet the requirements of this specification. Material is free of mercury contamination! Certificate of conformity: EN 10204 / 3.1
Cleaning and test procedure ASTM A632, S3
of Melf and Manufacturing is Thailand.

Country: _____

QC OK

Date: 20/12/2023


Quality Assurance

QC Inspector

BPE Specialized Technology

What is EP ?

EP is surface condition processing technology, which can be applied on various metal (Stainless steel, alloy stell etc) for obtaining high clean quality on surface.
EP process on stainless steel metal can obtain an advantage on metal surface with smooth, Clean, bacteria free and superior corrosion resistance finished .

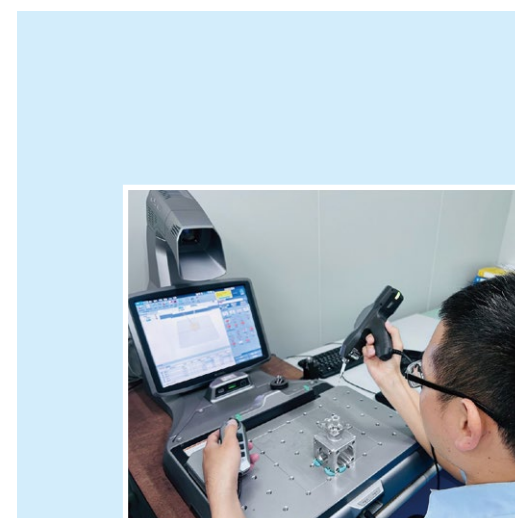

for Fitting

CSE MATERIAL TEST REPORT
MTR No.: CSE2402-692
CSE Chiang Sung Enterprise Co., Ltd.
CSE Technologies Co., Ltd.
39, 39/1, 39/2 Moo 7, NongChumpon Khaooy, Petchaburi 76140, Thailand
Tel: +66-32-796-234 Fax: +66-32-796-247
E-mail: csee@ms57.hinet.net
http://www.csee.com.tw

Customer: _____
Customer P.O. No.: _____
Issue Date: 29/2/2024
Customer P.S. No.: CSE-PS-DT11B-new-1
Invoice No.: _____
Shipped Quantity: PCS

Name of Article: DT-4.1.3-IE BPE Short Eccentric Reducer Machined
Article Weld Ends SF4 ID EP Finished Ra<0.38µm/ OD Pol. Ra<0.8µm 2.0"×1/2" 1.65
ASME BPE Standard 2022 Edition

Description: Tubing 2.0"×1/2"

Heat No. 490-0165

Material Type: AISI 316L

Chemical Composition %									Mechanical Features				
	C	Si	Mn	P	S	Ni	Cr	Mo	Yield Strength	Tensile Strength	Elongation	Reduction of Area	Hardness
Max.	0.035	1.00	2.00	0.045	0.017	14.00	18.00	3.00	0.2 % N/mm2	N/mm2	%	%	HRB
Min.					0.005	10.00	16.00	2.00	170	485	35	60	90
Result	0.0190	0.350	1.255	0.0280	0.0060	10.110	16.210	2.130	296	564	57	79	86.00

Heat Treatment: Annealed

Lot No.: 20327014

Attachments

ASME BPE Certificate No.: 122, Expiration Date: 2028-8-23

The material producer has certified that this material has been manufactured, samples, tested, and inspected in accordance with the specification, including year date and supplementary requirements, and that the results meet the requirements of this specification. Material is free of mercury contamination! Certificate of conformity: EN 10204 / 3.1
Cleaning and test procedure ASTM A632, S3

QC Inspector: _____ Date: 29/2/2024
Mr. Taweesak Kumkorn


QC OK

QC Inspector: _____ Date: 29/2/2024
Mr. Zhao Longhua

The different of EP & MP

1

Semi-finished Goods



2

Products Processed



3

Cleaning The Finished



4

Inspect



5


Finished Products



Mechanical Polishing (MP) & Electro-Polishing (EP)


1

Smeared Metal Surface



2

Surface after Mechanical Polishing




Although mechanical polishing (MP) is able to reduce the roughness from smeared stainless surface rapidly, there are still some defects:

1. Surface roughness (Ra) is only approx. 0.3-0.5μm that still has great possibility of adhering particles.
2. The passivation layer must be destroyed after MP and caused rust easily.
3. During MP, the particle adhering problem on the interior surface is too tough to meet perfect purity even if after high purity cleaning procedure.

3

Electro-Polishing Treatment



The performance of Electro-Polishing is able to smooth away all the defects of MP.

The features of EP are as following:


1. The stainless surface is dissolved by EP liquid to remove all the particles and reduce roughness (Ra) to 0.05μm.
2. During EP process, Fe ion separates out first of all and let a passivation layer (Cr2O3) be created on the stainless surface for higher resistance of corrosion.

4

Surface after Electro-Polishing



Perfect mirror finished surface without any impurities.

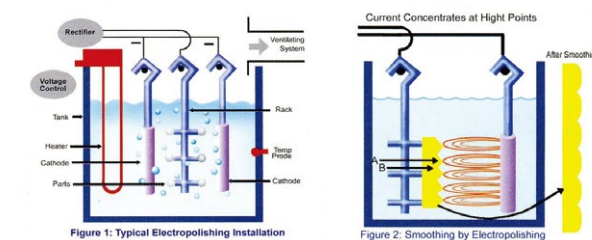

Advantage of EP

1. Superior performance in polishing : It can dramatically improve the surface roughness on metal to Ra 0.05μm.
2. High purity : EP can remove particle, as well metal fatigue and oxidized metal from work piece, as well make surface smoothly, on which bacteria can not survived. Smooth surface will help to solve the problem of particle adherent.
3. High resistance of corrosion : Passivation layer is a very important product, which is created on the surface of stainless steel during EP process. Stainless steel work piece processed with EP can obtain around 10 times corrosion resistance superior than no-EP one.

Fittings Specifications

Product:

Stainless Steel fittings comply with ASME BPE standards.
Gaskets are made from compounds which are FDA approved and USP 87, 88 Pharmaceutical Class VI certified.


Sizes:

Stainless Steel fittings are available in sizes 1/4" - 6" O.D. tube size.


Material:

Fittings are fabricated in AISI 316L Stainless Steel with sulfur content of 0.005-0.017% achieving superior repeatability for automatic orbital welding process.


Roundness




Wall Thickness




Squareness Face to Tangent





Off Angle



Off Plane



Height

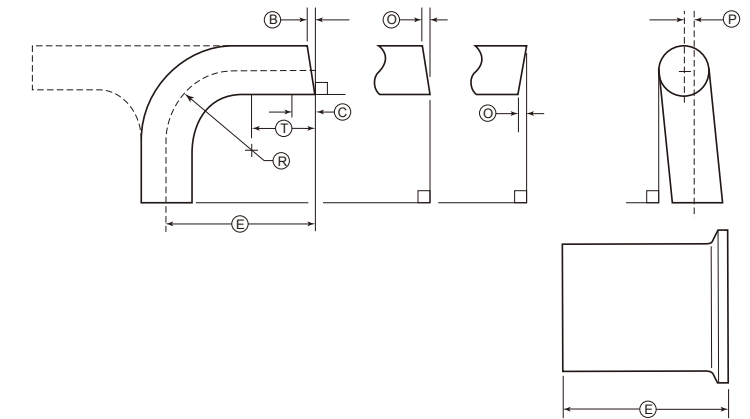

General Notes:

- a. Tolerance on (E) end-to-end and center-to-end: 0.050 in. (1.27 mm)
- b. Tolerance for centerline radius (CLR) is ±10% of the nominal dimension

Dimensions & Tolerances:

Dimensions as specified in ASME BPE Part DT-3-1

Nominal Size	O.D.		Wall Thickness Mechanical Polish (MP)		Wall Thickness Electropolish (EP)		Squareness Face to Tangent, B		Off Angle, O		Equivalent Angle (for O)	Off Plane, P		Centerline Radius (CLR), R	
	in.	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	deg	in.	mm	in.
1/4	± 0.005	± 0.13	+0.003/-0.004	+0.08/-0.10	+0.003/-0.006	+0.08/-0.15	0.005	0.13	0.009	0.23	2.1	0.030	0.76	0.563	14.30
3/8	± 0.005	± 0.13	+0.003/-0.004	+0.08/-0.10	+0.003/-0.006	+0.08/-0.15	0.005	0.13	0.012	0.3	1.8	0.030	0.76	1.125	28.58
1/2	± 0.005	± 0.13	+0.005/-0.008	+0.13/-0.20	+0.005/-0.010	+0.13/-0.25	0.005	0.13	0.014	0.36	1.6	0.030	0.76	1.125	28.58
3/4	± 0.005	± 0.13	+0.005/-0.008	+0.13/-0.20	+0.005/-0.010	+0.13/-0.25	0.005	0.13	0.018	0.46	1.4	0.030	0.76	1.125	28.58
1	± 0.005	± 0.13	+0.005/-0.008	+0.13/-0.20	+0.005/-0.010	+0.13/-0.25	0.008	0.20	0.025	0.64	1.4	0.030	0.76	1.500	38.10
1 1/2	± 0.008	± 0.20	+0.005/-0.008	+0.13/-0.20	+0.005/-0.010	+0.13/-0.25	0.008	0.20	0.034	0.86	1.3	0.050	1.27	2.250	57.15
2	± 0.008	± 0.20	+0.005/-0.008	+0.13/-0.20	+0.005/-0.010	+0.13/-0.25	0.008	0.20	0.043	1.09	1.2	0.050	1.27	3.000	76.20
2 1/2	± 0.010	± 0.25	+0.005/-0.008	+0.13/-0.20	+0.005/-0.010	+0.13/-0.25	0.010	0.25	0.054	1.37	1.2	0.050	1.27	3.750	95.25
3	± 0.010	± 0.25	+0.005/-0.008	+0.13/-0.20	+0.005/-0.010	+0.13/-0.25	0.016	0.41	0.068	1.73	1.3	0.050	1.27	4.500	114.30
4	± 0.015	± 0.38	+0.008/-0.010	+0.20/-0.25	+0.008/-0.012	+0.20/-0.30	0.016	0.41	0.086	2.18	1.2	0.060	1.52	6.000	152.40
6	± 0.030	± 0.76	+0.015/-0.015	+0.38/-0.38	+0.015/-0.017	+0.38/-0.43	0.030	0.76	0.135	3.43	1.3	0.060	1.52	9.000	228.60

Fittings Specifications

Surface Finish:

Reference: ASME BPE-2022, Part SF, Table SF-2.4-1.

Surface Finish Code	BPE Surface Designation	Inside Surface		Surface Condition	Outside Surface
		Ra Maximum μ-in.	μm		
PX	SF0			No finish requirement	No finish requirement
PC	SF1	20	0.51	Mechanically Polished [1]	Light Polish
PL	SF1	20	0.51	Mechanically Polished [1]	Mechanically polished to 32 Ra μ-in.
PD	SF4	15	0.38	Mechanically Polished [1] & Electropolished	Light Polish
PM	SF4	15	0.38	Mechanically Polished [1] & Electropolished	Mechanically polished to 32 Ra μ-in.
PR	-	10	0.25	Mechanically Polished [1] & Electropolished	Mechanically polished to 32 Ra μ-in.

[1] Or any other finishing method that meets the Ra max.

- CSE fittings guarantee the Ra in all internal surfaces, including bent areas where it is difficult to polish and difficult to measure.
- All Ra readings are taken across the lay, wherever possible.
- No single Ra reading shall exceed the Ra max. value in this table.
- Other Ra readings are available if agreed upon between owner/user and supplier, not to exceed values in this table.

Cleaning:

A multi step cleaning cycle is conducted to ensure that fittings are cleaned with a perfect passivation layer. The cleaning process involves degreasing, pickling, electro polishing (as required) and passivation. During the final stage, the fittings are double-rinsed using D.I. water.

Inspection Procedures:

All fittings produced by CSE production are 100% visually inspected for any surface finish imperfections, as mentioned in Table SF-2.2-1, SF-2.2-2, SF-2.4-1 and SF 2.6-1 in the ASME BPE 2014 specification. All dimensional characteristics are inspected for tolerances listed in parts DT-3-1 to DT-9.3-1 in the ASME BPE 2014 specification.

Fitting Marking Information:

Each fitting and process component is permanently laser Marked to show the following:

- Heat number/code traceable to material test report for each product contact surface component
- Material type
- Manufacturer's name, logo, & trademark
- Product contact surface designation for the appropriate BPE specification
- ASME BPE mark 

Packaging & Labeling:

Each fitting is capped, bagged and labeled in full compliance with the ASME BPE standard. Every label includes a QR Code which directs to the fitting's Material Test Report.

Documentation:

Full Material Test Reports are supplied with the finished products and are available On-Line at www.csee.com.tw

Professional Technical Equipment And Production



Spectrum Analysis Machine

Orbital Welding




Tube Pack



3D for Size Check



Roughness Check

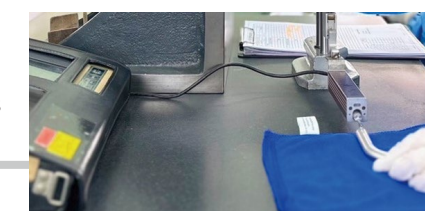

Laser Marks




Size Check



Precision And Strict Quality Control Process



**Bright Annealing
Process After Form**

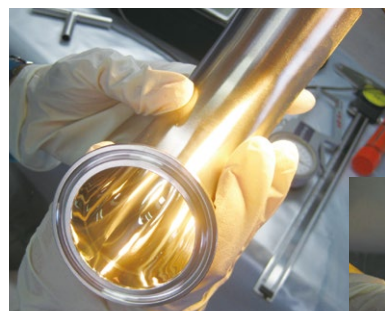

BPE EP Inspect



Welded License




BPE EP Processing



BPE Auto / Manual Control Valves

For many years, CSE Group always base on the highest principle of "To Attain The Minimum Residual" & "Zero Blind Spot" for the Diaphragm Valve designed. Now, we are the first assigns the brand for The cGMP & The National Health Research (NHRI)...and the other famous Pharmaceutical Factories. In addition, the designed also conform to BPE Standard.

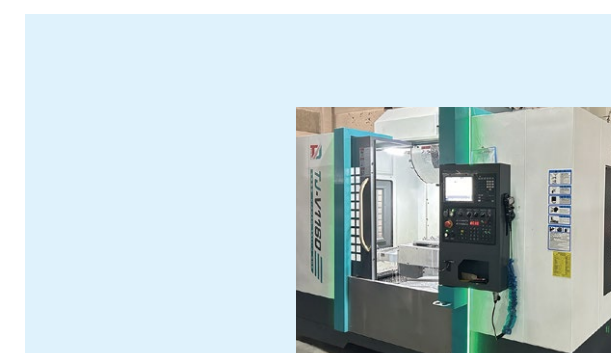

Manual Diaphragm Valve


A comfortable & reliability handle design is suitable for multi valves ensuring easily operations.

Positioning indicator

O-Ring sealing

Not loose screw parts during working.

The diaphragm seat is with all-round sealing edge.

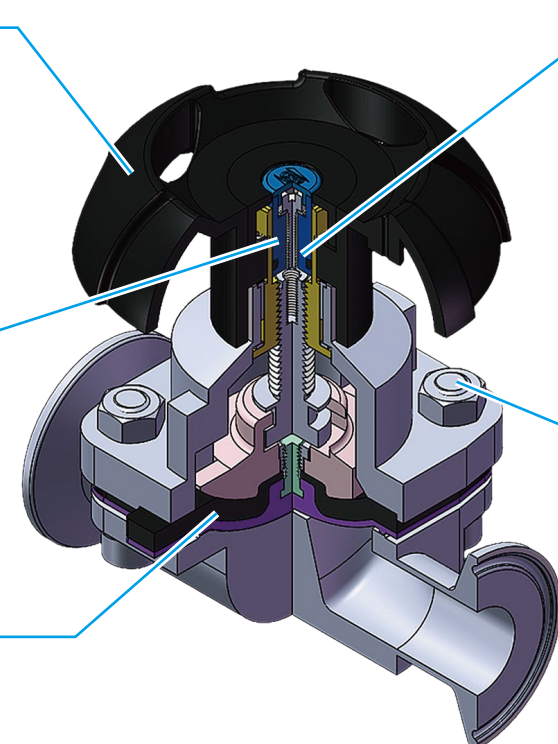

Pneumatic Diaphragm Valve

Stainless steel actuator



Piston drive

Air connector

Stem

Not loose screw parts during working.

The diaphragm seat is with all-round sealing edge.

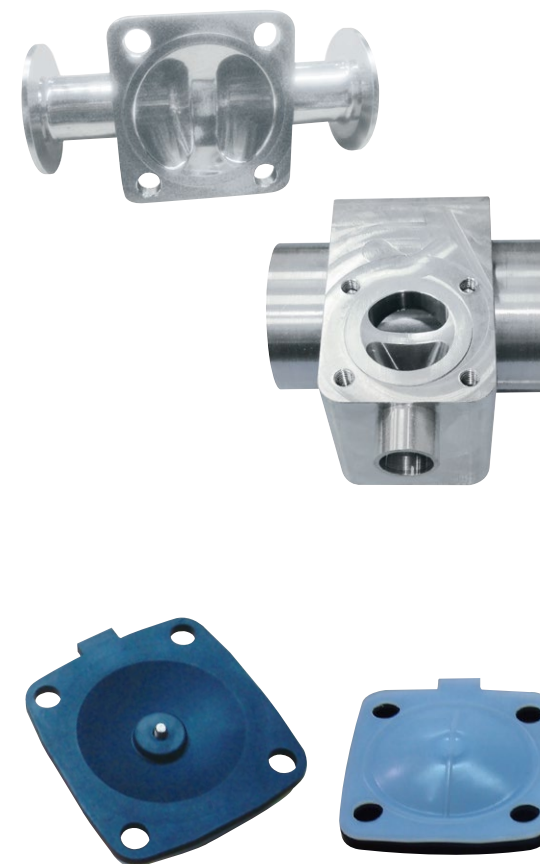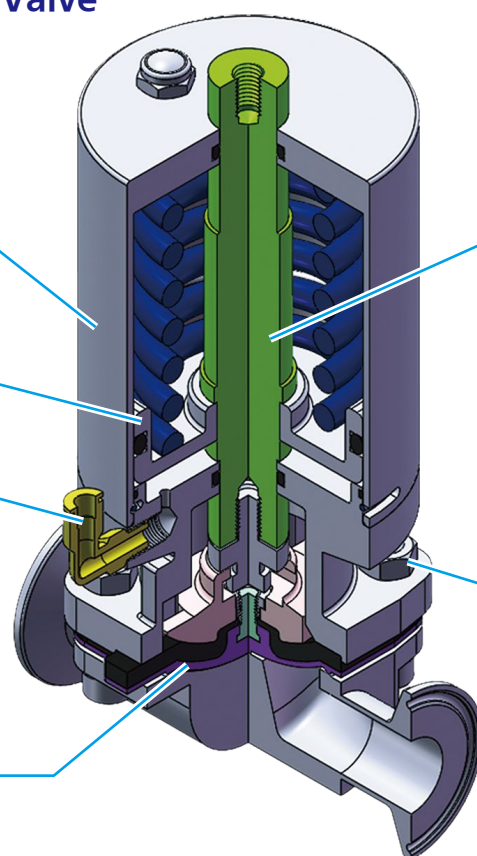

Body


All the materials of the body is 316L & Forged. The surface can be divided into two kinds- Sand Blasted & Electrolytic Polished (EP).

With the external body Electrolytic Polished. It improves the corrosion resistance and makes the external appearance more bright and beautiful as well. The Body ends connection sizes are processed by high precision CNC. Then, the body's inside is polished by professional polishing technology. CSE Group also can design more bodies according to the clients' requires.

Diaphragm

All the diaphragms in CSE Group meet sanitary and Pharmaceutical Standards and they have gained Certificate of FDA. The Diaphragms are high temperature resistant and strong corrosion resistance; they are of long service life and are widely used.


Internal Structure of the Diaphragm

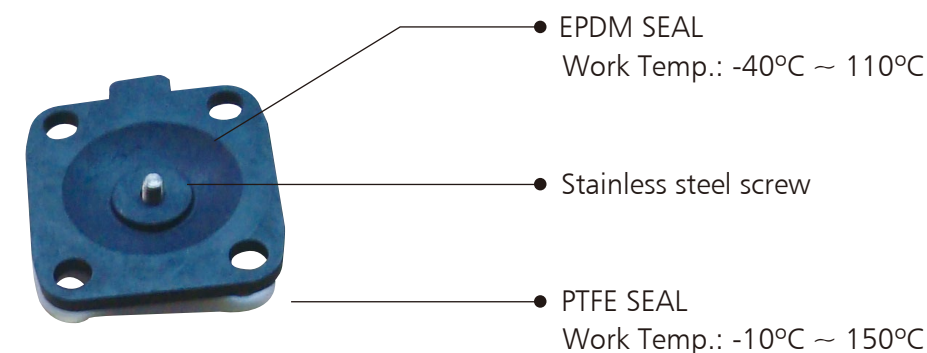

SIP Cycle Test

*Temperature	>130°C
*Pressure	>8bar
*Steam test time	>1 hour
*Action during steam test	10 times/1 hour<On for 5 minutes and 50 seconds, off for 10 seconds>
Action during steam test	Test Results
Loop 30 times	OK

Pneumatic/Manual Diaphragm Valve 2WAY

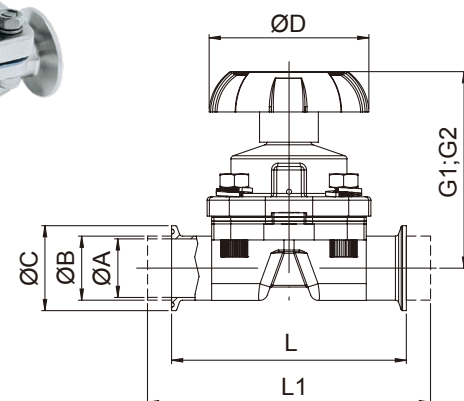

3A/BPE

SIZE	1/2"	3/4"	1"	1.5"	2"
ØA	9.4	15.75	22.1	34.8	47.5
ØB	12.7	19.05	25.4	38.1	50.8
ØC-3A	25	25	50.5	50.5	64
ØC-BPE	25	25	25/50.39	50.39	63.91
ØD	60	60	95	95	118
ØE	60	60	85	85	133
F1	122	122	212	217	315
F2	131	131	225	232	333
G1	74	74	100	119	135
G2	83	83	113	134	153
L	88.9	101.6	114.3	139.7	158.8
L1	124	135	141.2	168.4	190.5

Tank Bottom Valve



Material:

- Body: Forged/316L
- Diaphragm: EPDM+PTFE/NC or NO

Connection:

- Clamp End/Weld End...

Operation:

- Normal Open / Normal Close

Work Temp.:


- Diaphragm: EPDM+PTFE (-10°C~150°C)

Work Pressure:

- Max: 10 Bar

Surface:


- SF1: ID Polished to $Ra \leq 0.5\mu m$ / SF4: EP Finished to $Ra \leq 0.38\mu m$
- ID/OD Mirror Polished & ID $Ra \leq 0.5\mu m$ / OD Sand Blasted...

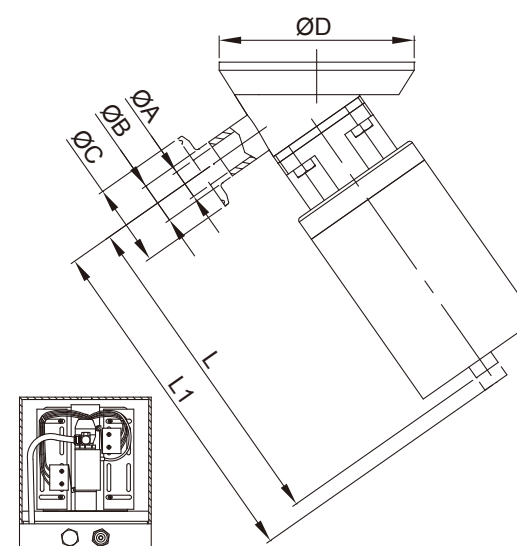

SIZE	1/2"	3/4"	1"	1.5"	2"
ØA	9.4	15.75	22.1	34.8	47.5
ØB	12.7	19.05	25.4	38.1	50.8
ØC	25	25	50.5	50.5	64
ØD	100	100	120	160	160
L	122	122	212	217	315
L1	131	131	225	232	333
L2	74	74	100	119	135
L3	83	83	113	134	153

DIN

DIN	DN10	DN20	DN25	DN32	DN40	DN50
ØA	10	20	26	32	38	50
ØB	13	23	29	35	41	53
ØC	34	34	50.5	50.5	50.5	64
ØD	—	60	60	95	95	118
ØE	60	85	85	85	85	133
F1	122	212	212	217	217	315
F2	131	225	225	232	232	333
G1	74	100	100	119	119	135
G2	83	113	113	134	134	153
L	88.9	101.6	114.3	139.7	139.7	158.8
L1	124	135	141.2	168.4	168.4	190.5

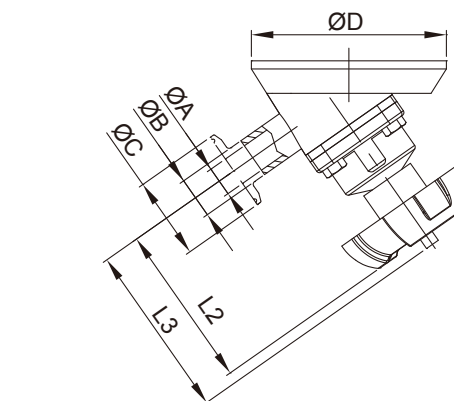

NEW Control Box



- 360° clear top cover could understand the valves situation more quick and clear.
- Fault indicator light , easy for fault resolution.
- With single-acting & double-acting option could according to the valves and actuator to choose.
- The new 4 in 1 PCB design and quick plug-in connection design, make on-site installation quickly .
- With non-contact proximity switch to position detection. (teaching function).
- Multi color status indicator light for clear and easy manager the system .

Tank Bottom Valve (Pneumatic/Manual)



“No Residual” & “Zero Blind Spot.” Design

- The material will throw-up with 45 degree to make the body will not residual and it will use CIP System or Ultra-Hight Temperate (UHT) Cleaning design. The design is conform to BPE Standard.


The Actuator can be to “Take off and Replace quickly.”

The Actuator can be set in Control Box.

Construction Summarization





The Flange of Tank Bottom Valves can be welded directly to containers or tank.

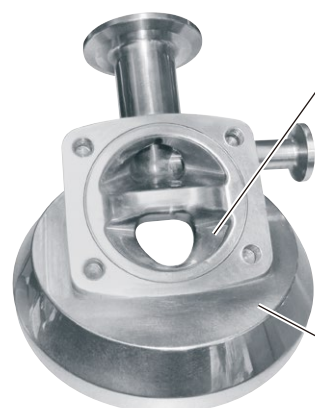

The material will throw-up with 45 degree to make the body will not residual


The Body is Forged
The Material is 316L

Pneumatic/Manual Diaphragm Valve T-TYPE 3WAY

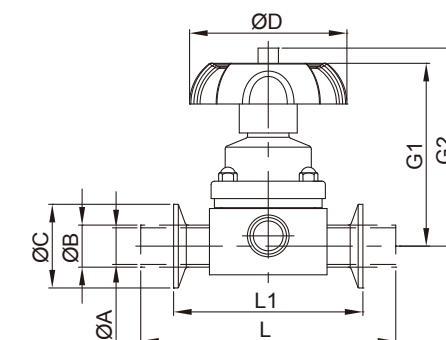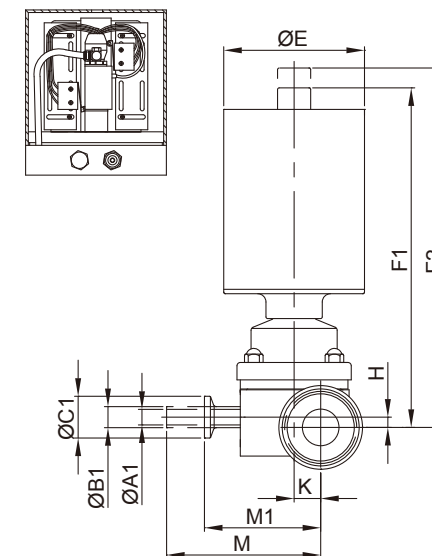

SIZE	1/2"x1/2"	1/2"x3/4"	1/2"x1"	1/2"x1.5"	1/2"x2"	3/4"x3/4"	3/4"x1"	3/4"x1.5"	3/4"x2"	1"x1"	1"x1.5"	1"x2"	1.5"x1.5"	1.5"x2"	2"x2"
ØA	9.4	15.75	22.1	34.8	47.5	15.75	22.1	34.8	47.5	22.1	34.8	47.5	34.8	47.5	47.5
ØB	12.7	19.05	25.4	38.1	50.8	19.05	25.4	38.1	50.8	25.4	38.1	50.8	38.1	50.8	50.8
ØC	25	25	50.5	50.5	64	25	50.5	50.5	64	50.5	50.5	64	50.5	64	64
ØA1	9.4	9.4	9.4	9.4	9.4	15.75	15.75	15.75	15.75	22.1	22.1	22.1	34.8	34.8	47.5
ØB1	12.7	12.7	12.7	12.7	12.7	19.05	19.05	19.05	19.05	25.4	25.4	25.4	38.1	38.1	50.8
ØC1	25	25	25	25	25	25	25	25	25	50.5	50.5	50.5	50.5	50.5	64
ØD	60	60	60	60	60	60	60	60	60	95	95	95	95	95	118
ØE	60	60	60	60	60	60	60	60	60	85	85	85	85	85	133
F1	122	122	122	122	122	122	122	122	122	212	212	212	217	217	315
F2	131	131	131	131	131	131	131	131	131	225	225	225	232	232	333
G1	74	74	74	74	74	74	74	74	74	100	100	100	119	119	135
G2	83	83	83	83	83	83	83	83	83	113	113	113	134	134	153
H	—	6.18	13.2	19.5	19.5	4.5	10.7	17.5	17.5	6.2	14.5	18.4	6.2	13.7	—
K	6.8	9.98	13.15	19.5	25.85	9.98	13.15	19.5	25.85	16.05	22.4	28.75	22.4	28.75	28.75
L	139.7	139.7	154	153.6	153.6	139.7	153.6	153.6	153.6	172.6	172.6	172.6	197.6	197.6	211.6
L1	88.9	88.9	114.3	114.3	114.3	88.9	114.3	114.3	114.3	114.3	114.3	114.3	139.7	139.7	158.8
M	69.4	72.58	75.75	82.1	88.45	72.58	75.75	82.1	88.45	86.65	93	99.35	105	111.35	123.75
M1	51	54.18	57.35	63.7	70.05	54.18	57.35	63.7	70.05	70.6	74.6	80.95	86.6	92.95	98.95

Pneumatic/Manual Diaphragm Valve 3WAY/U-Bend Valve

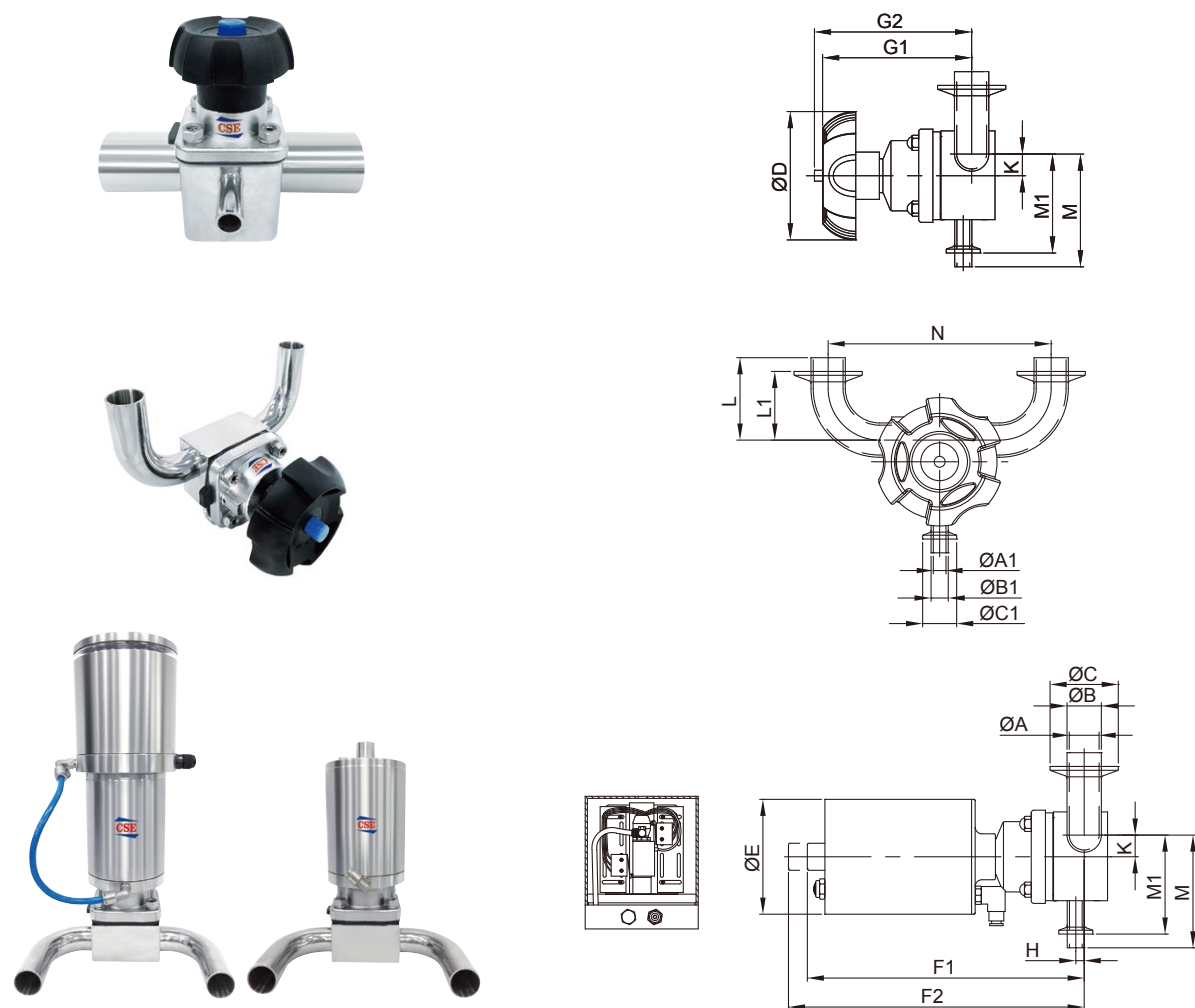

SIZE	1/2"x1/2"	3/4"x1/2"	1"x1/2"	1.5"x1/2"	2"x1/2"	3/4"x3/4"	1"x3/4"	1.5"x3/4"	2"x3/4"	1"x1"	1.5"x1"	2"x1"	1.5"x1.5"	2"x1.5"	2"x2"
ØA	9.4	15.75	22.1	34.8	47.5	15.75	22.1	34.8	47.5	22.1	34.8	47.5	34.8	47.5	47.5
ØB	12.7	19.05	25.4	38.1	50.8	19.05	25.4	38.1	50.8	25.4	38.1	50.8	38.1	50.8	50.8
ØC	25	25	50.5	50.5	64	25	50.5	50.5	64	50.5	50.5	64	50.5	64	64
ØA1	9.4	9.4	9.4	9.4	9.4	15.75	15.75	15.75	15.75	22.1	22.1	22.1	34.8	34.8	47.5
ØB1	12.7	12.7	12.7	12.7	12.7	19.05	19.05	19.05	19.05	25.4	25.4	25.4	38.1	38.1	50.8
ØC1	25	25	25	25	25	25	25	25	25	50.5	50.5	50.5	50.5	64	64
ØD	60	60	60	60	60	60	60	60	60	95	95	95	95	95	118
ØE	60	60	60	60	60	60	60	60	60	85	85	85	85	85	133
F1	122	122	122	122	122	122	122	122	122	212	212	212	217	217	315
F2	131	131	131	131	131	131	131	131	131	225	225	225	232	232	333
G1	74	74	74	74	74	74	74	74	74	100	100	100	119	119	135
G2	83	83	83	83	83	83	83	83	83	113	113	113	134	134	153
H	—	6.18	13.44	19.5	19.5	4.5	10.7	17.5	17.5	6.2	14.5	18.4	6.2	13.7	—
K	6.8	9.98	13.15	19.5	25.85	9.98	13.15	19.5	25.85	16.05	22.4	28.75	22.4	28.75	28.75
L	57.15	66.68	76.2	95.3	120.7	66.68	76.2	95.3	120.7	76.2	95.3	120.7	95.3	120.7	120.7
L1	31.75	41.25	50.8	69.9	88.9	41.28	50.8	69.9	88.9	50.8	69.9	88.9	69.9	88.9	88.9
M	69.4	72.85	75.75	82.1	88.45	72.58	72.75	82.1	88.45	70.6	93	99.35	105	111.35	123.75
M1	51	54.18	57.35	63.7	70.05	54.18	57.35	63.7	70.05	68.25	74.6	80.95	86.6	92.95	98.95
N	101.7	120.7	165.1	203.3	241.3	120.7	165.1	203.3	241.3	165.1	203.3	241.3	228.7	266.7	285.8


Multi-port Diaphragm Valve

TDV TYPE

The multi-port body design is helping to streamline the fitting line and is taking the advantages of the combination of traditional valve position and assembly, and there are options of a variety of angles and positions in series to choose from for venting or steering, often using for sampling or steam.

Level main body at drain angle / vertical sub-body (LAV0 – type)

Vertical main body / horizontal sub-body at drain angle (V0HA – type)

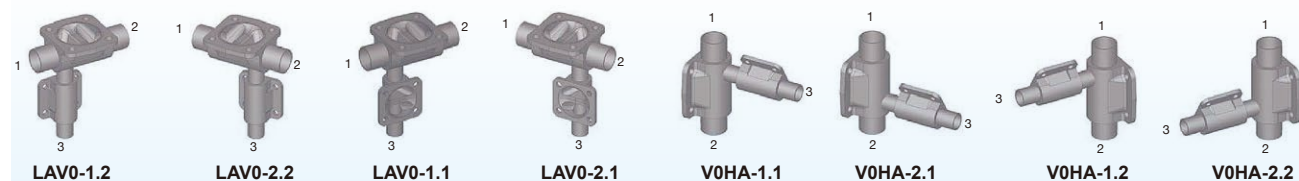

Level main body at drain angle / vertical sub-body at drain angle (LAVA – type)


Level main body at drain angle / horizontal sub-body at drain angle (LAHA – type)



Block Diaphragm Valve

BDV TYPE

The block diaphragm valve body is designed to be no gap which can ensure completely drain and zero dead angle, and optimize the complex tubing-line system for safe fluid configuration, recommended for horizontal installation position.

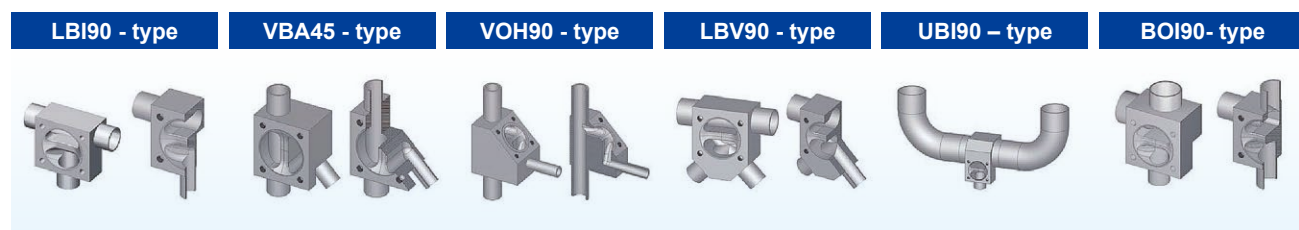




Eccentric bodies for sampling: A-type, B-type, C-type, D-type. Center bodies for sampling: A-type, B-type, C-type, D-type. Fully integrated type: Fully integrated type.



Joint Multi Port To Block Design For Sterile Reduce Space Application

Features

1. Of the various block valves added to the specification, it's possible to make.
2. It saves space of a dead Reg minimum and installation space.
3. Self drains can lay the pipes.
4. Of a plumbing, it's possible to reduce.
5. In validation time, it's possible to reduce.
6. Please consult about the various requirements by which it's for grind and a connection separately.

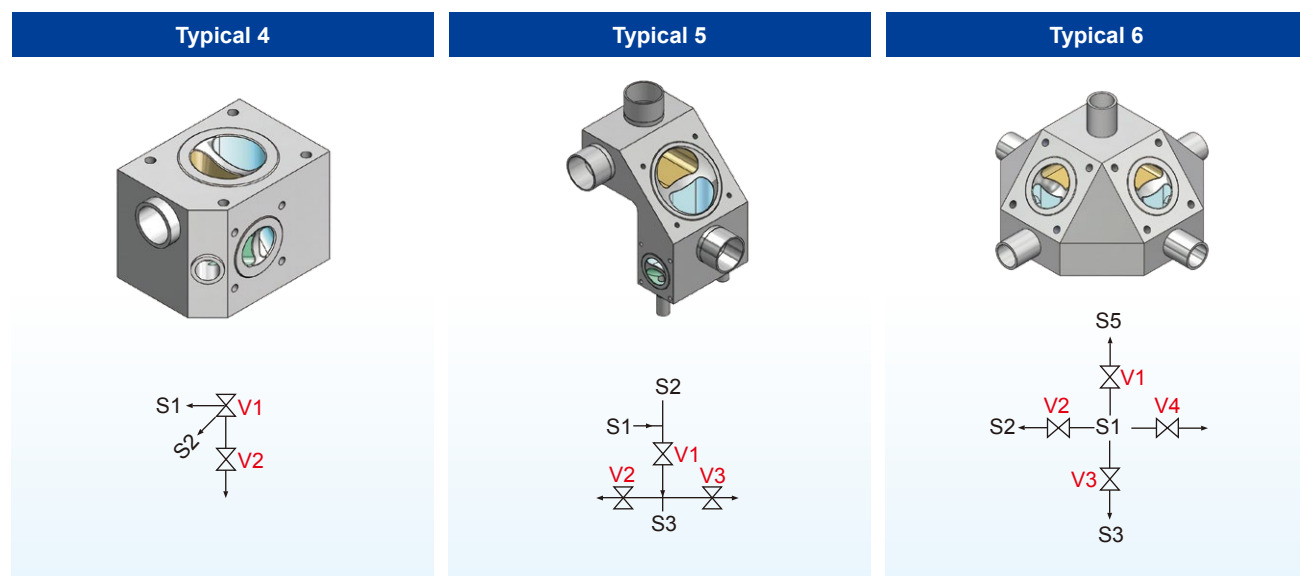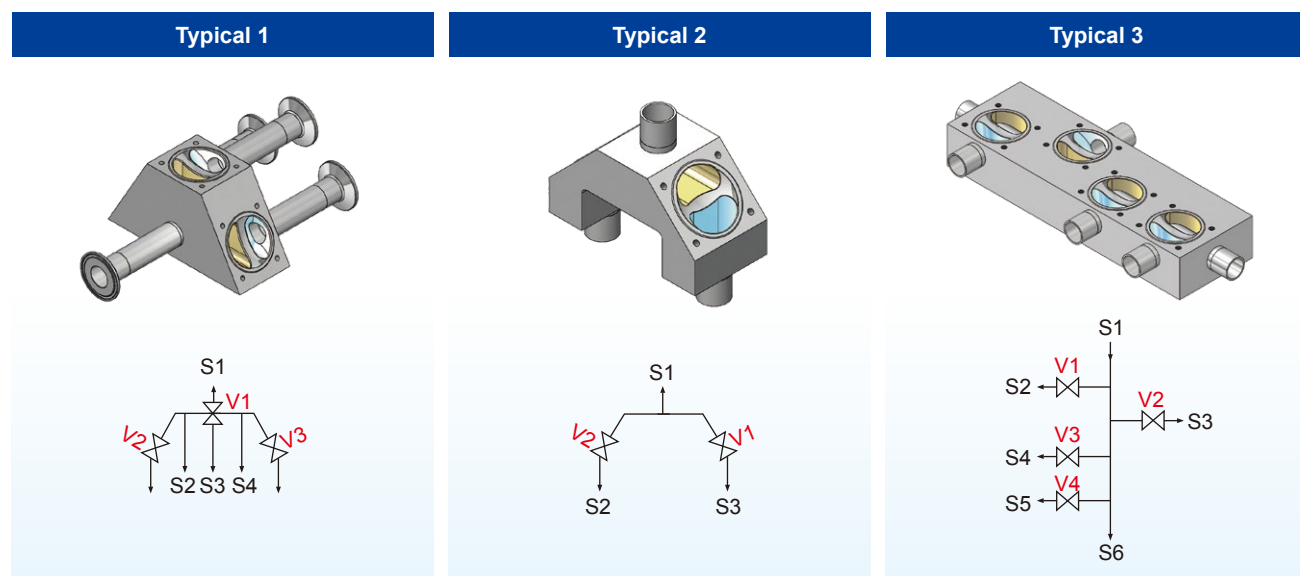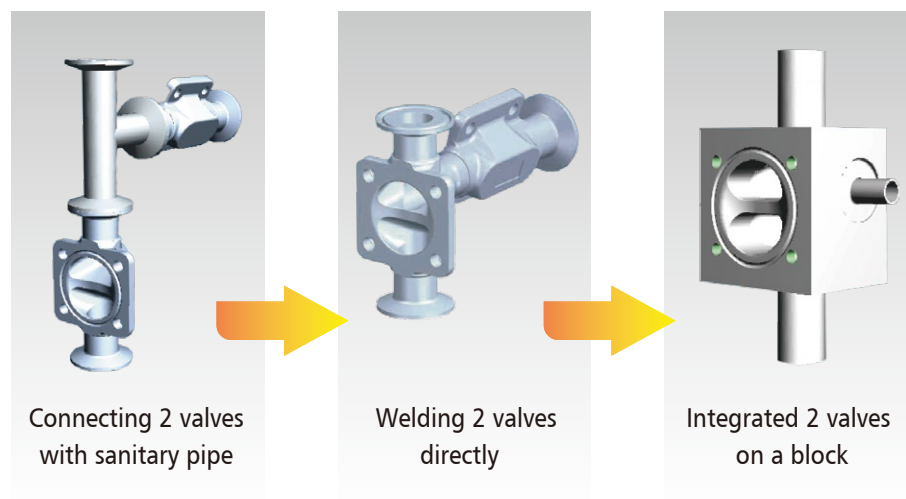

Diaphragm valve with sub-body connecting and block type ones that composed of two or more valve bodies both are an innovative concept design combined with modern processing technology. The multi-port direction valve body is convenient to connect to different tubing-lines which can save installation time and space, it can also be designed according to customized requirements as multi-angle or installing location. These types of valve bodies made of forged or cast materials are mostly used for sampling or steam applications. It can simplify the traditional valve combination configuration, and the design that can reduce the dead angle and ensure complete drainage to achieve the effect of sterilization.

Advantage

- Customized specific design.
- Compact design and smaller envelope dimension is achievable for the actuators.
- Combination of many different nominal diameters.
- Optimized drain ability and minimized dead leg.
- Reduction of using fittings, tubing and welding jobs in a system.
- All end connections and materials are available according to the customer's specification.



Code Description

Multi-port type Example : LAV0 - 1.1

L	A	V	0	-	1	1
Main body	Main body tilt angle	Sub-body	Sub-body Angle tilt angle		The location to connect sub-body with main body	Sub-body direction
level = L vertical = V	With tilt angle = A Without tilt angle = 0	Horizontal = H vertical = V	With tilt angle = A Without tilt angle = 0		Left = 1 right = 2	1 = front 2 = behind

Block type Example : LBI90

L	B	I	90
Main run	Diaphragm + main run	Outlet port shape	Outlet port angle
level = L vertical = V U type = U Bending = B	back to back = B not level = O	tilt = A upright = I V type = V Bending = B Horizontal = H	45° = 45 90° = 90

Sample Valve for BPE

UHT Sterilizing & No Residual Others OEM

CSE Sampling Valve product line is specifically designed for taking process samples in breweries, wineries, food and beverage manufacturing facilities, as well as in pharmaceutical, biotechnology, chemical and cosmetic manufacturing to ensure quality, consistency, taste, sterility. Sampling is extremely important at all stages of production, as it allows for trials and analyses and is often the way a potential problem is caught. CSE Sampling Valve has minimal moving parts, simple design, competitive price, and proven cleanliness in process manufacturing.




Hygienic Sample Valve for BPE

Materials:


- Flow area: AISI 316L
- Other steel parts: AISI 316
- Plug stem: AISI 316L
- Gasket for flow area: EPDM/ Silicon/ FKM

Technical data:

- Temperature range: Full vacuum. -10°C to +140°C (EPDM).

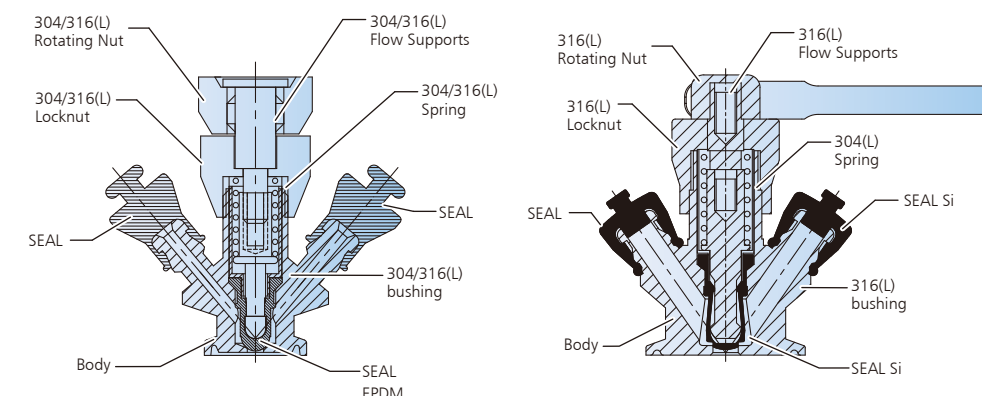


DX Type

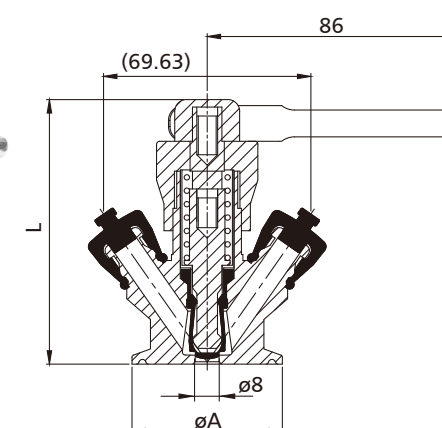

Clamp/ Weld End

SIZE	ØA	L
1.0"	50.5	88.8


DA Type

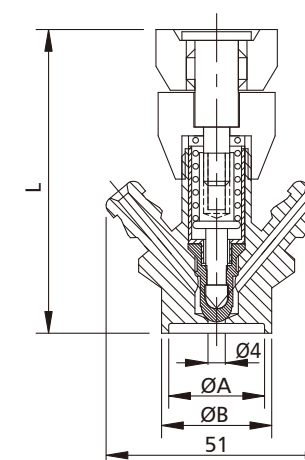

Clamp/ Weld End

SIZE	ØA	ØB	L
1/2"	9.4	12.7	71.5
3/4"	15.75	19.05	71.5
1.0"	22.1	25.4	71.5

DB Type

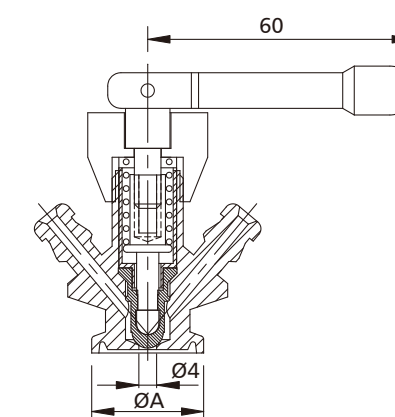


Clamp/ Weld End


SIZE	ØA	L
A37	34	70
1/2"	25.2	70
3/4"	25.2	70
1.0"	50.5	70

CSE Sample Cock Valve


C Type

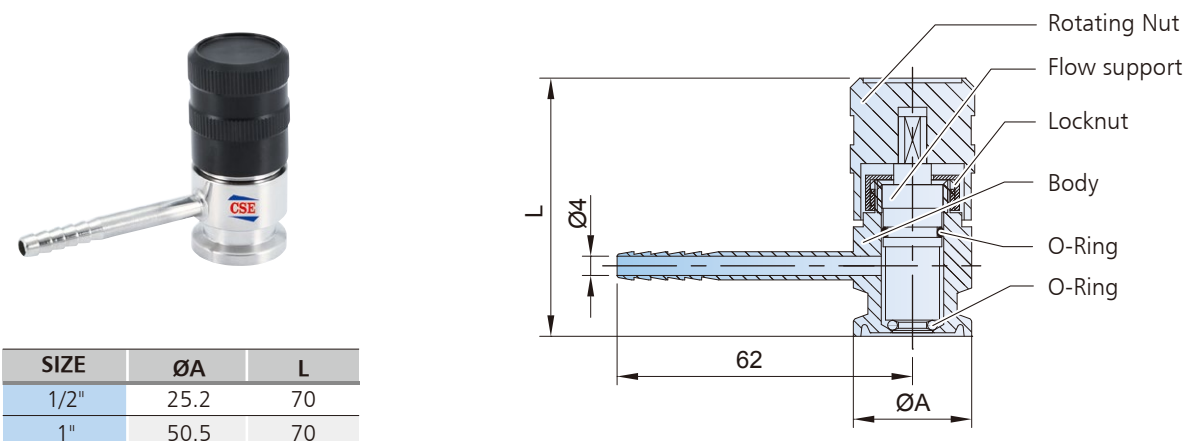

D Type

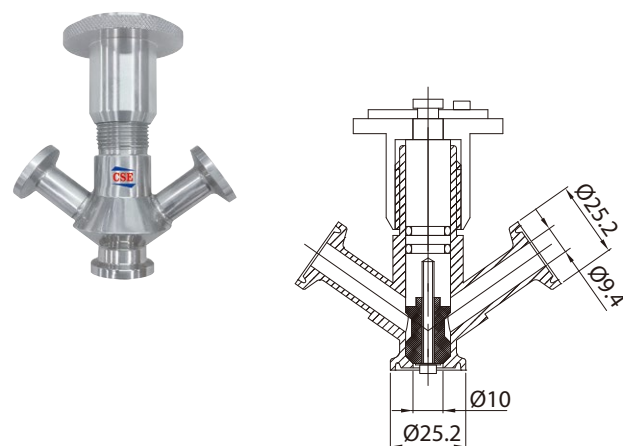


F Type

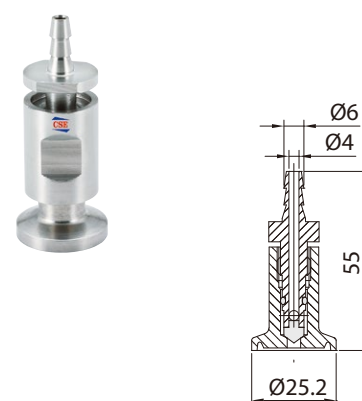


CSE Diaphragm Sample Valve

DVH Type

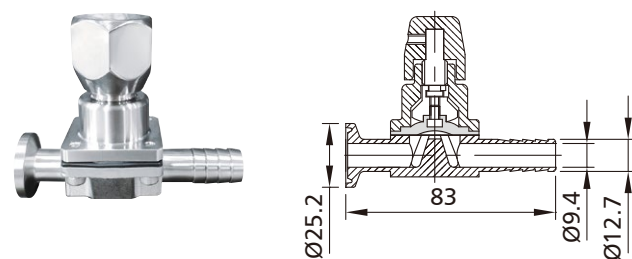

DVL Type

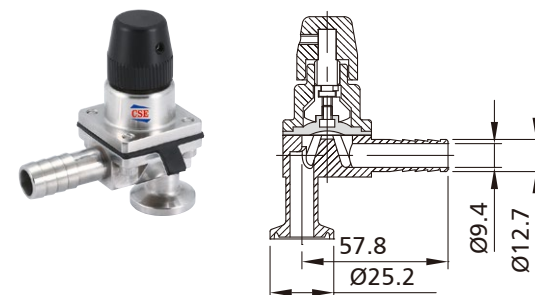

Auto Aseptic Valve & Manual Purity Valve

For Joint any

Tube fitting-3A, SMS, DIN, BS, Elbow, Tee, Reducer
Clamp-Union-Weld/Expanding Ferrule, Clamp, Valve-Butterfly, Check, Sight Glass, Ball Valve with our Orbitol weld Equipment



CSE Hygienic Filter & OEM for BPE



OEM series valves



(Mf) Membrane Filter

Mini-filter




Filling Valve

Steam Trap



Bellow Sterile Valves

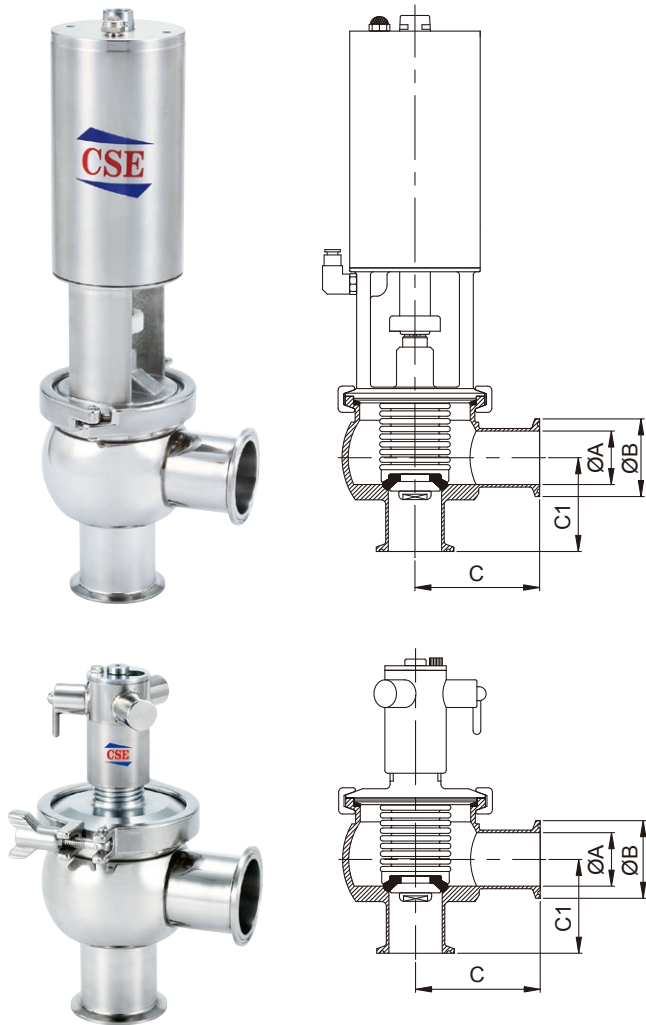


SIZE	ØA	ØB	C	C1
1.0"	22.1	50.5	58.5	50.6
1.5"	34.8	50.5	81.2	61
2.0"	47.5	64	85.7	65.4
2.5"	60.2	77.5	103.1	72.1
3.0"	72.9	91	116.4	79.7

STYPE

Micro-Filter


- Material
Housing: 304/316L
- Connection
Clamp End/Weld End/ IDF Male End
- Surface
ID/OD Mirror Polished

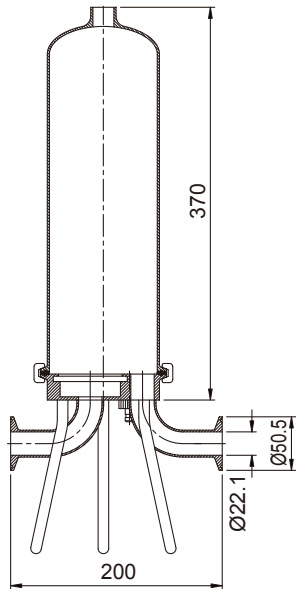


CSE STRAINERS

- Material: SUS304/SUS316L
- Mesh: 20~400
- Aperture Size: 1~10(mm)
- P.D.Press(MPa): 0.05~0.2
- Types: Weld end/ Clamp end/
Male end/ Female end

Filter kind

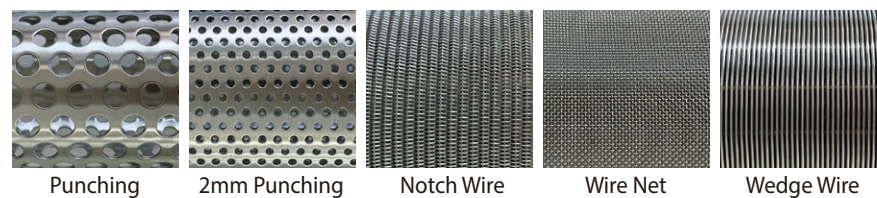


INLINE STRAINER I TYPE

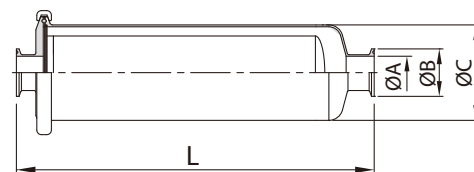

STRAINER INLINE TYPE (I)

SIZE	ØA	ØB	ØC	L
1.0"	22.2	50.5	101.6	380
1.5"	34.8	50.5	101.6	380
2.0"	47.5	64	101.6	380
2.5"	60.2	77.5	101.6	450
3.0"	72.9	91	101.6	550


SIDE OUTLET STRAINER L TYPE

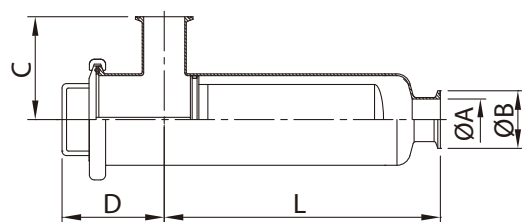

STRAINER SIDE OUTLET TYPE (L)

SIZE	ØA	ØB	C	D	L
1"	22.1	50.5	104.8	110	310
1.5"	34.8	50.5	104.8	110	310
2"	47.5	64	114.3	110	310
2.5"	60.2	77.5	108	110	410
3"	72.9	91	108	110	490

Y TYPE

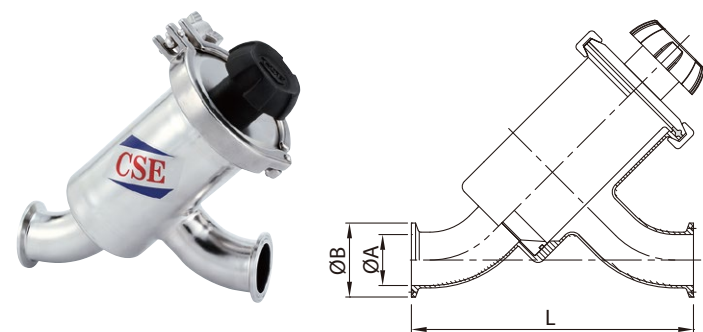


STRAINER Y TYPE

SIZE	ØA	ØB	L
1.0"	22.1	50.5	155.65
1.5"	34.8	50.5	192.63
2.0"	47.5	64	208.17
2.5"	60.2	77.5	271.26
3.0"	72.9	91	300.83



Sanitary Standard Pressure Gauge

Note:


Sanitary pressure gauges are stainless steel products specifically designed to meet the demanding sanitary requirements for food dairy, beverage, pharmaceutical and biotech applications. Complies with 3A sanitary standard, water-proof, shock resistant, and closed structures are durable and accurate, good for long time running. All series are liquid-filled, special materials movement and bourdon tube have lasting durability. It is applicable to the places of both strong fluctuation and non-corrosive fluid, such as air, water and oil.

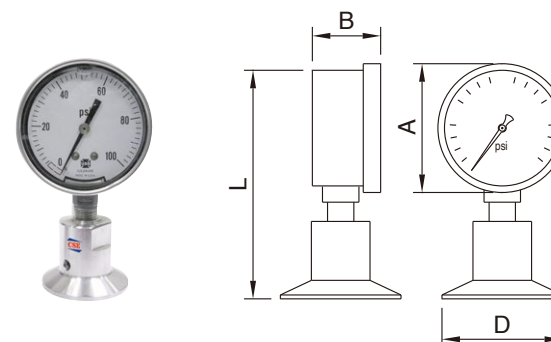


SIZE	A	B	L
Ø50	56	30	100
Ø63	69	30	122
Ø80	89	30	140
Ø100	112	47	166
Ø160	160	50	224

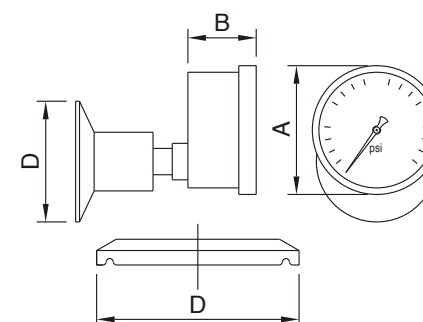

SIZE	D (Tri-clamp)
1.0"	50.5
1.5"	50.5
2.0"	64
2.5"	77.5
3.0"	91
4.0"	119



Inline Instrument / Inline Sight Glass

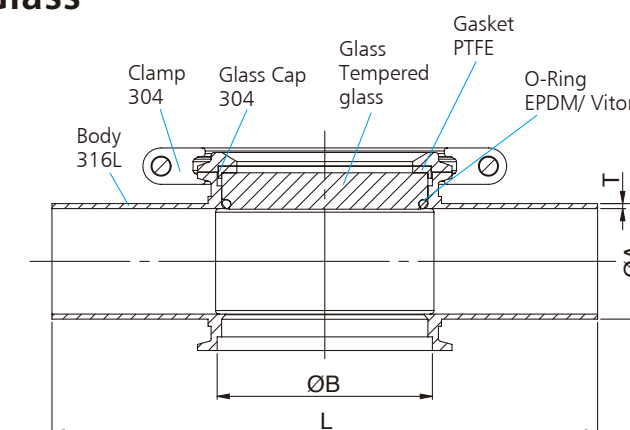

- Materials :
- Flow area: AISI 316L
- Other steel parts: AISI 316L/304
- Gasket for flow area: EPDM / Viton / FKM
- Technical data:
- Temperature range: -10°C to +130°C

STRAINER INLINE TYPE (I)

SIZE	ØA	ØB	L	L
1.5"	38.1	71	180	1.65
2.0"	50.8	71	180	1.65
2.5"	63.5	71	250	1.65

BPE Pharmaceutical / Biotechnology Fitting & Tube

CSE offer series of high capacity product in pharmaceutical flowing control system, we use the special material on BPE welding: low sulphur ASTM SS 316L, $S \leq 0.005\% \sim 0.017\%$ which meets the standard of orbital welding. We also off electro-polished in ID to satisfy your demands.



CSE HIGH PURITY TUBE & FITTING VALVE (ASME BPE STANDARD)

Pharmaceutical/Biotechnology fitting. CSE have over 15 years hygienic fitting experiences for developing out the ASME bioprocessing equipment (BPE) standard tube, fitting, valve components for high purity application such as water for injection, pharmaceutical, cosmetics use. Material : low sulphur ASTM SS316L, $S : \leq 0.005\% \sim 0.017\%$,



MTR certificate will be offered.

Surface options:

Ra Reading for Tubing

As drawing and / or mechanically polished			Mechanically Polished and Electropolished or Electropolished		
Surface Designation	Ra Average		Surface Designation	Ra Average	
	μ -in	μ -m		μ -in	μ -m
SF1	20	0.5	SF4	15	0.38
SF2	25	0.63	SF5	20	0.5
SF3	30	0.76	SF6	25	0.63

Ra Reading for Fitting

Mechanically polished			Mechanically Polished and Electropolished		
Surface Designation	Ra Average		Surface Designation	Ra Average	
	μ -in	μ -m		μ -in	μ -m
SF1	20	0.5	SF4	15	0.38
SF2	25	0.63	SF5	20	0.5
SF3	30	0.76	SF6	25	0.63

Outer surface: Tubes and fittings $Ra \leq 32 \mu\text{in}$ ($0.8 \mu\text{m}$)



Dimension & tolerance :

SIZE	OD	Wall thickness		Squareness face To tangent * B	Off angle O	Off plane P
		Mechanical polish	Electropolish			
1/2"	± 0.13	+0.13/-0.2	+0.13/-0.25	0.13	0.36	0.76
3/4"	± 0.13	+0.13/-0.2	+0.13/-0.25	0.13	0.46	0.76
1.0"	± 0.13	+0.13/-0.2	+0.13/-0.25	0.2	0.64	0.76
1.5"	± 0.2	+0.13/-0.2	+0.13/-0.25	0.2	0.86	1.27
2.0"	± 0.2	+0.13/-0.2	+0.13/-0.25	0.2	1.09	1.27
2.5"	± 0.25	+0.13/-0.2	+0.13/-0.25	0.25	1.37	1.27
3.0"	± 0.25	+0.13/-0.2	+0.13/-0.25	0.41	1.73	1.27
4.0"	± 0.38	+0.2/-0.25	+0.2/-0.30	0.41	2.18	1.52

General Notes :

Tolerance on E end-to-end and center-to-end : 1.27mm

Toerance for centerline radius (CLR) is $\pm 10\%$ of the nominal dimension.

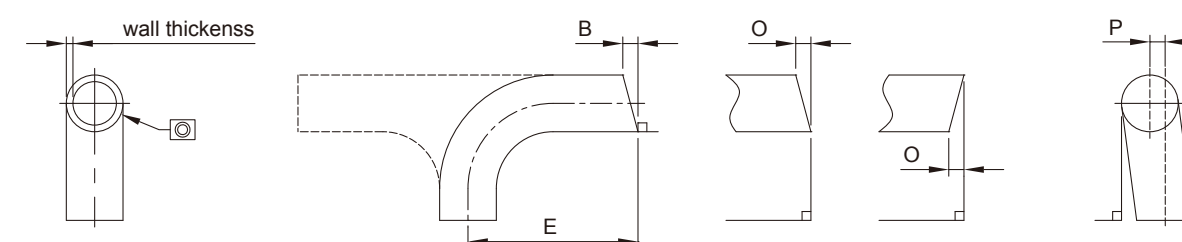

BPE Stainless Steel Tubing

Absolutely hygienic conditions are necessary for the entire production cycle of pharmaceutical and ultra-high industries.

Therefore, tubes, fittings, and valves with a smooth internal surface are extensively installed with the advantages of cleaning easily and avoiding bacteria contamination.

CSE only offers tubes that are manufactured, quality controlled, marked, and certified according to the highest standards for hygienic equipment design and guarantees extended quality and traceability. CSE BPE tubing significantly reduces inspection requirements prior to installation by utilizing only the highest quality stainless steel materials.

CSE delivers directly from stock the following stainless steel tubes in grade TP316L with low sulfur content of 0.005% to 0.0017% and SF1 and SF4 finishes (according to the ASME BPE specification)



SF1
The package is with blue protective cover on both ends + plastic outer bag label stick to two both ends of the plastic outer bag




SF4
The packaging is with plastic film and white protective cap on both ends + PVC bag + SF4 sticker label on both ends tube bag.

STANDARDS:
ASTM A270-2015 S2

SURFACE FINISH: SF0~SF6
SF1 ID Pol. Ra<0.5μm/
OD Pol. Ra<0.8μm
SF4 ID EP Finished Ra<0.38μm/
OD Pol. Ra<0.8μm

CSE BPE EP products with following advantages:

- Homogeneously EP layer to minimize rouging
- Higher chrome concentration for better corrosion resistance
- Guaranteed smoothness of all internal surfaces to reduce Bio film

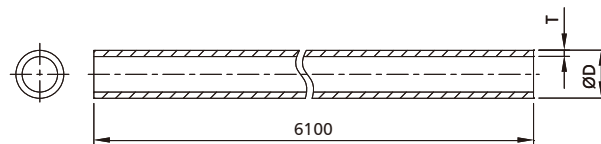

SIZE	ØD	T
1/8"	3.18	0.56
1/4"	6.35	0.89
3/8"	9.53	0.89
1/2"	12.7	1.65
3/4"	19.05	1.65
1.0"	25.4	1.65
1.5"	38.1	1.65
2.0"	50.8	1.65
2.5"	63.5	1.65
3.0"	76.2	1.65
4.0"	101.6	2.11
6.0"	152.4	2.77

Marking



ASME BPE (BPE REFERENCE NO.)
TP316L size SFX
(H.T.NO.)



ASTM A270 TP316L ASME-BPE DT-4-1 SF-X WLD NDE Size X length X Heat NO X

Package Type

SF1




SF4




Survey	O1s	Cr2p3	Fe2p3	Ni2p3	Mo3d	Cr : Fe
1.5" TEE 1810D (sputter 1.5mm)	56.28	19.74	19.02	3.94	1.02	1.04 : 1

1.5" TEE 1810D Depth profile




Note: "—" is shown the value under detection limit of XPS analysis.

BPE Fittings




DT-4.1.1-1 LONG WELD 90° ELBOW (DT-7)

SIZE	ØD	L	T
1/2"	12.7	76.2	1.65
3/4"	19.05	76.2	1.65
1"	25.4	76.2	1.65
1.5"	38.1	95.25	1.65
2"	50.8	120.65	1.65
2.5"	63.5	139.7	1.65
3"	76.2	158.75	1.65
4"	101.6	203.2	2.11
6"	152.4	292.1	2.77

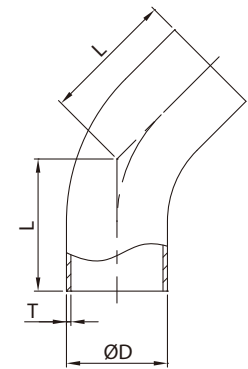


DT-4.1.1-4 LONG 45° ELBOW (DT-8)

SIZE	ØD	L	T
1/2"	12.7	57.15	1.65
3/4"	19.05	57.15	1.65
1"	25.4	57.15	1.65
1.5"	38.1	63.5	1.65
2"	50.8	76.2	1.65
2.5"	63.5	85.73	1.65
3"	76.2	92.08	1.65
4"	101.6	114.3	2.11
6"	152.4	158.75	2.77



DT-4.1.2-1C CROSS (DT-9)


SIZE	ØD	L	T
1/2"	12.7	95.26	1.65
3/4"	19.05	101.6	1.65
1"	25.4	107.96	1.65
1.5"	38.1	120.66	1.65
2"	50.8	146.06	1.65
2.5"	63.5	158.76	1.65
3"	76.2	171.46	1.65
4"	101.6	209.56	2.11
6"	152.4	285.76	2.77

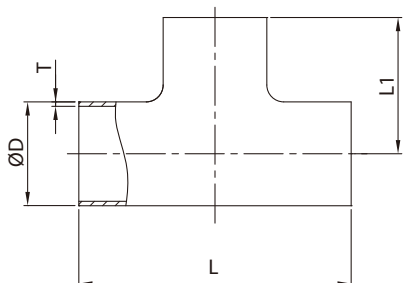

DT-4.1.2-1T TEE (DT-9)

SIZE	ØD	L	L1	T
1/2"	12.7	95.26	47.63	1.65
3/4"	19.05	101.6	50.8	1.65
1"	25.4	107.96	53.98	1.65
1.5"	38.1	120.66	60.33	1.65
2"	50.8	146.06	73.03	1.65
2.5"	63.5	158.76	79.38	1.65
3"	76.2	171.46	85.73	1.65
4"	101.6	209.56	104.78	2.11
6"	152.4	285.76	142.88	2.77


(a)

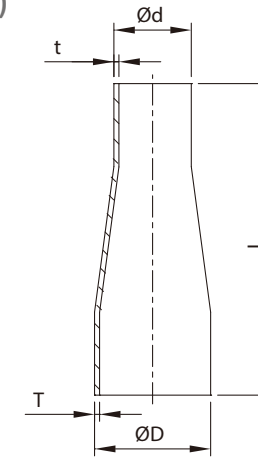

DT-4.1.3-1 CONCENTRIC REDUCER (DT11)


SIZE	ØD	Ød	L	L1	T	t
3/4"×1/2"	19.05	12.7	101.6	53.93	1.65	1.65
1.0"×1/2"	25.4	12.7	114.3	63.5	1.65	1.65
1.0"×3/4"	25.4	19.05	101.6	53.93	1.65	1.65
1.5"×3/4"	38.1	19.05	127	76.2	1.65	1.65
1.5"×1.0"	38.1	25.4	127	63.5	1.65	1.65
2.0"×1.0"	50.8	25.4	184.2	85.73	1.65	1.65
2.0"×1.5"	50.8	38.1	133.4	63.5	1.65	1.65
2.5"×1.5"	63.5	38.1	184.2	85.73	1.65	1.65
2.5"×2.0"	63.5	50.8	139.7	63.5	1.65	1.65
3.0"×1.5"	76.2	38.1	235	107.95	1.65	1.65
3.0"×2.0"	76.2	50.8	190.5	85.73	1.65	1.65
3.0"×2.5"	76.2	63.5	139.7	66.68	1.65	1.65
4.0"×2.0"	101.6	50.8	298.5	130.18	2.11	1.65
4.0"×2.5"	101.6	63.5	247.7	107.95	2.11	1.65
4.0"×3.0"	101.6	76.2	196.9	98.43	2.11	1.65
6.0"×3.0"	152.4	76.2	—	184.15	2.77	1.65
6.0"×4.0"	152.4	101.6	254	142.88	2.77	2.11

(b)




BPE Fittings

(a)


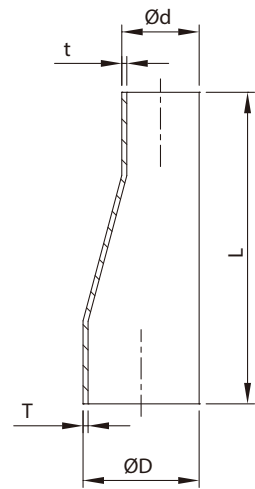


(b)



DT-4.1.3-1 ECCENTRIC REDUCER (DT11)

SIZE	ØD	Ød	L	L1	T	t
3/4"×1/2"	19.05	12.7	101.6	53.93	1.65	1.65
1.0"×1/2"	25.4	12.7	114.3	63.5	1.65	1.65
1.0"×3/4"	25.4	19.05	101.6	53.93	1.65	1.65
1.5"×3/4"	38.1	19.05	127	76.2	1.65	1.65
1.5"×1.0"	38.1	25.4	127	63.5	1.65	1.65
2.0"×1.0"	50.8	25.4	184.2	85.73	1.65	1.65
2.0"×1.5"	50.8	38.1	133.4	63.5	1.65	1.65
2.5"×1.5"	63.5	38.1	184.2	85.73	1.65	1.65
2.5"×2.0"	63.5	50.8	139.7	63.5	1.65	1.65
3.0"×1.5"	76.2	38.1	235	107.95	1.65	1.65
3.0"×2.0"	76.2	50.8	190.5	85.73	1.65	1.65
3.0"×2.5"	76.2	63.5	139.7	66.68	1.65	1.65
4.0"×2.0"	101.6	50.8	298.5	130.18	2.11	1.65
4.0"×2.5"	101.6	63.5	247.7	107.95	2.11	1.65
4.0"×3.0"	101.6	76.2	196.9	98.43	2.11	1.65
6.0"×3.0"	152.4	76.2	—	184.15	2.77	1.65
6.0"×4.0"	152.4	101.6	254	142.88	2.77	2.11

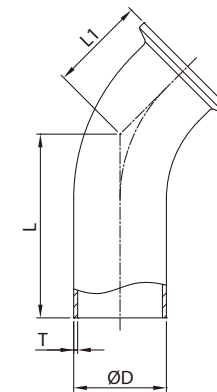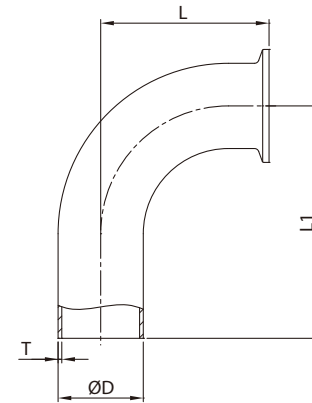

DT-4.1.1-2 90° CLAMP/WELD ELBOW (DT-12)

SIZE	ØD	L	L1	T
1/2"	12.7	41.28	76.2	1.65
3/4"	19.05	41.28	76.2	1.65
1"	25.4	50.8	76.2	1.65
1.5"	38.1	69.85	95.25	1.65
2"	50.8	88.9	120.65	1.65
2.5"	63.5	107.95	139.7	1.65
3"	76.2	127	158.75	1.65
4"	101.6	168.28	203.2	2.11
6"	152.4	266.7	292.1	2.77

DT-4.1.1-5 45° CLAMP/WELD ELBOW (DT-13)



SIZE	ØD	L	L1	T
1/2"	12.7	57.15	25.4	1.65
3/4"	19.05	57.15	25.4	1.65
1"	25.4	57.15	28.58	1.65
1.5"	38.1	63.5	36.53	1.65
2"	50.8	76.2	44.45	1.65
2.5"	63.5	85.73	52.4	1.65
3"	76.2	92.08	60.33	1.65
4"	101.6	114.3	79.38	2.11
6"	152.4	158.75	133.35	2.77

DT-4.1.1-3 90° CLAMP ELBOW (DT-16)


SIZE	ØD	L	T
1/2"	12.7	41.28	1.65
3/4"	19.05	41.28	1.65
1"	25.4	50.8	1.65
1.5"	38.1	69.85	1.65
2"	50.8	88.9	1.65
2.5"	63.5	107.95	1.65
3"	76.2	127	1.65
4"	101.6	168.28	2.11
6"	152.4	266.7	2.77

DT-4.1.1-6 45° CLAMP ELBOW (DT-17)

SIZE	ØD	L	T
1/2"	12.7	25.4	1.65
3/4"	19.05	25.4	1.65
1"	25.4	28.58	1.65
1.5"	38.1	36.5	1.65
2"	50.8	44.45	1.65
2.5"	63.5	52.4	1.65
3"	76.2	60.33	1.65
4"	101.6	79.38	2.11
6"	152.4	133.35	2.77




BPE Fittings

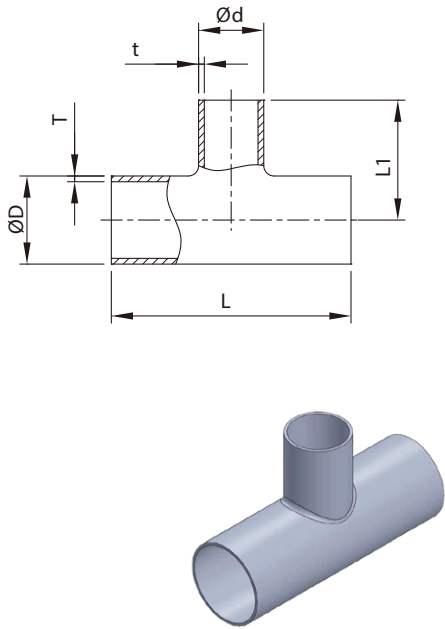

DT-4.1.2-6 REDUCING TEE (DT-10)


SIZE	ØD	Ød	L	L1	T	t
3/4"×1/2"	19.05	12.7	101.6	50.8	1.65	1.65
1"×1/2"	25.4	12.7	107.96	53.98	1.65	1.65
1"×3/4"	25.4	19.05	107.96	53.98	1.65	1.65
1.5"×1/2"	38.1	12.7	120.66	60.33	1.65	1.65
1.5"×3/4"	38.1	19.05	120.66	60.33	1.65	1.65
1.5"×1"	38.1	25.4	120.66	60.33	1.65	1.65
2"×1/2"	50.8	12.7	146.06	66.68	1.65	1.65
2"×3/4"	50.8	19.05	146.06	66.68	1.65	1.65
2"×1"	50.8	25.4	146.06	66.68	1.65	1.65
2"×1.5"	50.8	38.1	146.06	66.68	1.65	1.65
2.5"×1/2"	63.5	12.7	158.76	73.03	1.65	1.65
2.5"×3/4"	63.5	19.05	158.76	73.03	1.65	1.65
2.5"×1"	63.5	25.4	158.76	73.03	1.65	1.65
2.5"×1.5"	63.5	38.1	158.76	73.03	1.65	1.65
2.5"×2"	63.5	50.8	158.76	73.03	1.65	1.65
3"×1/2"	76.2	12.7	171.46	79.38	1.65	1.65
3"×3/4"	76.2	19.05	171.46	79.38	1.65	1.65
3"×1"	76.2	25.4	171.46	79.38	1.65	1.65
3"×1.5"	76.2	38.1	171.46	79.38	1.65	1.65
3"×2"	76.2	50.8	171.46	79.38	1.65	1.65
3"×2.5"	76.2	63.5	171.46	79.38	1.65	1.65
4"×1/2"	101.6	12.7	209.56	92.08	2.11	1.65
4"×3/4"	101.6	19.05	209.56	92.08	2.11	1.65
4"×1"	101.6	25.4	209.56	92.08	2.11	1.65
4"×1.5"	101.6	38.1	209.56	92.08	2.11	1.65
4"×2"	101.6	50.8	209.56	98.43	2.11	1.65
4"×2.5"	101.6	63.5	209.56	98.43	2.11	1.65
4"×3"	101.6	76.2	209.56	98.43	2.11	1.65
6"×3"	152.4	76.2	285.76	123.83	2.77	1.65
6"×4"	152.4	101.6	285.76	130.18	2.77	2.11

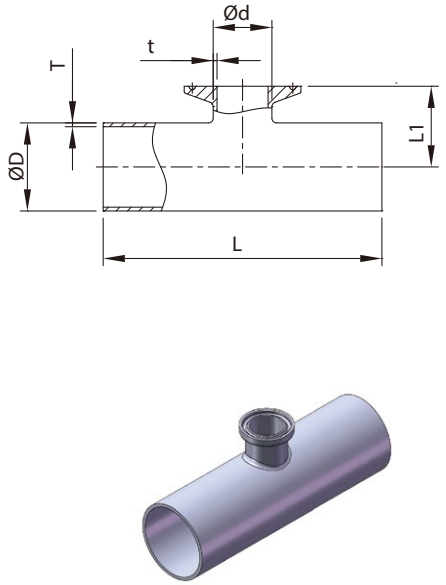

DT-4.1.2-7 SHORT OUTLET W/C REDUCING TEE (DT-14)


SIZE	ØD	Ød	L	L1	T	t
3/4"×1/2"	19.05	12.7	101.6	25.4	1.65	1.65
1"×1/2"	25.4	12.7	107.96	28.58	1.65	1.65
1"×3/4"	25.4	19.05	107.96	28.58	1.65	1.65
1.5"×1/2"	38.1	12.7	120.66	34.93	1.65	1.65
1.5"×3/4"	38.1	19.05	120.66	34.93	1.65	1.65
1.5"×1"	38.1	25.4	120.66	34.93	1.65	1.65
2"×1/2"	50.8	12.7	146.06	41.28	1.65	1.65
2"×3/4"	50.8	19.05	146.06	41.28	1.65	1.65
2"×1"	50.8	25.4	146.06	41.28	1.65	1.65
2"×1.5"	50.8	38.1	146.06	41.28	1.65	1.65
2.5"×1/2"	63.5	12.7	158.76	47.63	1.65	1.65
2.5"×3/4"	63.5	19.05	158.76	47.63	1.65	1.65
2.5"×1"	63.5	25.4	158.76	47.63	1.65	1.65
2.5"×1.5"	63.5	38.1	158.76	47.63	1.65	1.65
2.5"×2"	63.5	50.8	158.76	47.63	1.65	1.65
3"×1/2"	76.2	12.7	171.46	53.98	1.65	1.65
3"×3/4"	76.2	19.05	171.46	53.98	1.65	1.65
3"×1"	76.2	25.4	171.46	53.98	1.65	1.65
3"×1.5"	76.2	38.1	171.46	53.98	1.65	1.65
3"×2"	76.2	50.8	171.46	53.98	1.65	1.65
3"×2.5"	76.2	63.5	171.46	53.98	1.65	1.65
4"×1/2"	101.6	12.7	209.56	66.68	2.11	1.65
4"×3/4"	101.6	19.05	209.56	66.68	2.11	1.65
4"×1"	101.6	25.4	209.56	66.68	2.11	1.65
4"×1.5"	101.6	38.1	209.56	66.68	2.11	1.65
4"×2"	101.6	50.8	209.56	66.68	2.11	1.65
4"×2.5"	101.6	63.5	209.56	66.68	2.11	1.65
4"×3"	101.6	76.2	209.56	66.68	2.11	1.65
6"×1/2"	152.4	12.7	285.76	92.08	2.77	1.65
6"×3/4"	152.4	19.05	285.76	92.08	2.77	1.65
6"×1"	152.4	25.4	285.76	92.08	2.77	1.65
6"×1.5"	152.4	38.1	285.76	92.08	2.77	1.65
6"×2"	152.4	50.8	285.76	92.08	2.77	1.65
6"×2.5"	152.4	63.5	285.76	92.08	2.77	1.65
6"×3"	152.4	76.2	285.76	92.08	2.77	1.65
6"×4"	152.4	101.6	285.76	92.25	2.77	2.11

BPE Fittings

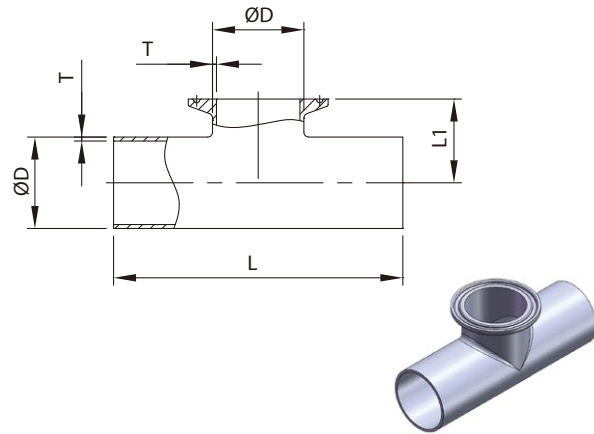


DT-4.1.2-2 EQUAL OUTLET WELD/CLAMP TEE (DT-15)

SIZE	ØD	L	L1	T
1/2"	12.7	95.26	25.4	1.65
3/4"	19.05	101.6	28.58	1.65
1"	25.4	107.96	28.59	1.65
1.5"	38.1	120.66	34.39	1.65
2"	50.8	146.06	41.28	1.65
2.5"	63.5	158.76	47.63	1.65
3"	76.2	171.46	53.98	1.65
4"	101.6	209.56	69.85	2.11
6"	152.4	285.76	117.48	2.77

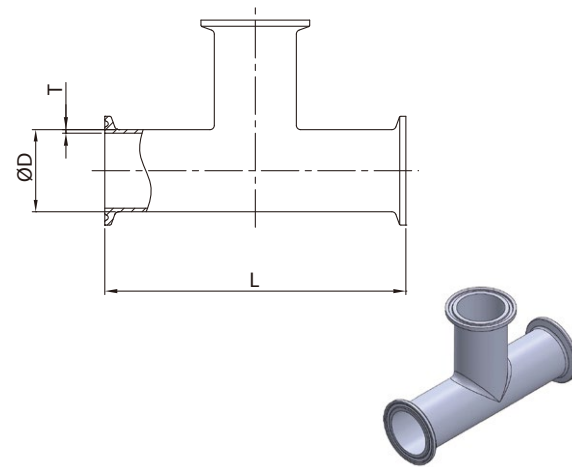


DT-4.1.2-4T CLAMP TEE (DT-18)

SIZE	ØD	L	T
1/2"	12.7	114.3	1.65
3/4"	19.05	120.66	1.65
1"	25.4	133.36	1.65
1.5"	38.1	146.06	1.65
2"	50.8	171.46	1.65
2.5"	63.5	184.16	1.65
3"	76.2	196.86	1.65
4"	101.6	241.3	2.11
6"	152.4	361.96	2.77

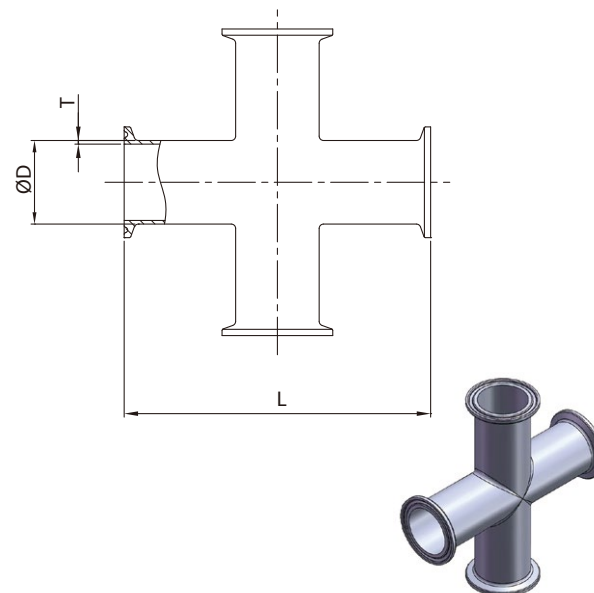

DT-4.1.2-4C CLAMP CROSS (DT-18)

SIZE	ØD	L	T
1/2"	12.7	114.3	1.65
3/4"	19.05	120.66	1.65
1"	25.4	133.36	1.65
1.5"	38.1	146.06	1.65
2"	50.8	171.46	1.65
2.5"	63.5	184.16	1.65
3"	76.2	196.86	1.65
4"	101.6	241.3	2.11
6"	152.4	361.96	2.77

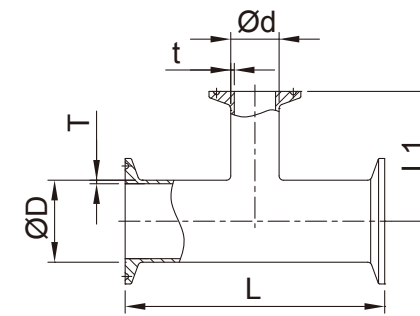


DT-4.1.2-8 REDUCING TEE CLAMP END (DT-19)

SIZE	ØD	Ød	L	L1	T	t
3/4" * 1/2"	19.05	12.7	127	63.5	1.65	1.65
1.0" * 1/2"	25.4	12.7	133.36	66.68	1.65	1.65
1.0" * 3/4"	25.4	19.05	133.36	66.68	1.65	1.65
1.5" * 1/2"	38.1	12.7	146.06	73.03	1.65	1.65
1.5" * 3/4"	38.1	19.05	146.06	73.03	1.65	1.65
1.5" * 1.0"	38.1	25.4	146.06	73.03	1.65	1.65
2.0" * 1/2"	50.8	12.7	171.46	79.38	1.65	1.65
2.0" * 3/4"	50.8	19.05	171.46	79.38	1.65	1.65
2.0" * 1.0"	50.8	25.4	171.46	79.38	1.65	1.65
2.0" * 1.5"	50.8	38.1	171.46	79.38	1.65	1.65
2.5" * 1/2"	63.5	12.7	184.16	85.73	1.65	1.65
2.5" * 3/4"	63.5	19.05	184.16	85.73	1.65	1.65
2.5" * 1.0"	63.5	25.4	184.16	85.73	1.65	1.65
2.5" * 1.5"	63.5	38.1	184.16	85.73	1.65	1.65
2.5" * 2.0"	63.5	50.8	184.16	85.73	1.65	1.65
3.0" * 1/2"	76.2	12.7	196.86	92.08	1.65	1.65
3.0" * 3/4"	76.2	19.05	196.86	92.08	1.65	1.65
3.0" * 1.0"	76.2	25.4	196.86	92.08	1.65	1.65
3.0" * 1.5"	76.2	38.1	196.86	92.08	1.65	1.65
3.0" * 2.0"	76.2	50.8	196.86	92.08	1.65	1.65
3.0" * 2.5"	76.2	63.5	196.86	92.08	1.65	1.65
4.0" * 1/2"	101.6	12.7	241.3	104.78	2.11	1.65
4.0" * 3/4"	101.6	19.05	241.3	104.78	2.11	1.65
4.0" * 1.0"	101.6	25.4	241.3	104.78	2.11	1.65
4.0" * 1.5"	101.6	38.1	241.3	104.78	2.11	1.65
4.0" * 2.0"	101.6	50.8	241.3	111.13	2.11	1.65
4.0" * 2.5"	101.6	63.5	241.3	111.13	2.11	1.65
4.0" * 3.0"	101.6	76.2	241.3	111.13	2.11	1.65
6.0" * 3.0"	152.4	76.2	361.96	136.53	2.77	1.65
6.0" * 4.0"	152.4	101.6	361.96	146.05	2.77	2.11




BPE Fittings

DT-4.1.2-9 REDUCING TEE CLAMP END (DT-20)

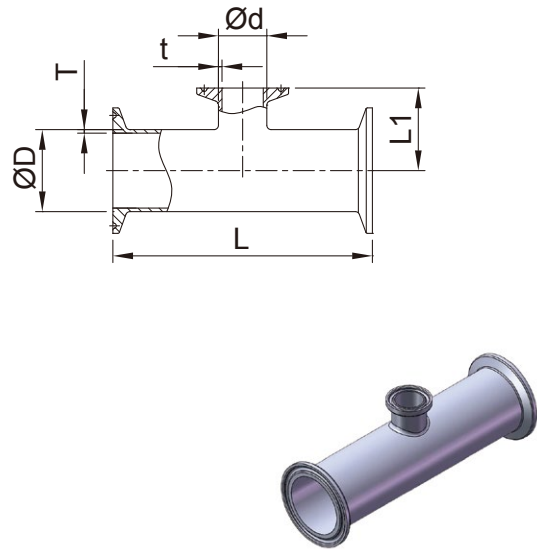


SIZE	ØD	Ød	L	L1	T	t
3/4"×1/2"	19.05	12.7	127	25.4	1.65	1.65
1.0"×1/2"	25.4	12.7	133.36	28.58	1.65	1.65
1.0"×3/4"	25.4	19.05	133.36	28.58	1.65	1.65
1.5"×1/2"	38.1	12.7	146.06	34.93	1.65	1.65
1.5"×3/4"	38.1	19.05	146.06	34.93	1.65	1.65
1.5"×1.0"	38.1	25.4	146.06	34.93	1.65	1.65
2.0"×1/2"	50.8	12.7	171.46	41.28	1.65	1.65
2.0"×3/4"	50.8	19.05	171.46	41.28	1.65	1.65
2.0"×1.0"	50.8	25.4	171.46	41.28	1.65	1.65
2.0"×1.5"	50.8	38.1	171.46	41.28	1.65	1.65
2.5"×1/2"	63.5	12.7	184.16	47.63	1.65	1.65
2.5"×3/4"	63.5	19.05	184.16	47.63	1.65	1.65
2.5"×1.0"	63.5	25.4	184.16	47.63	1.65	1.65
2.5"×1.5"	63.5	38.1	184.16	47.63	1.65	1.65
2.5"×2.0"	63.5	50.8	184.16	47.63	1.65	1.65
3.0"×1/2"	76.2	12.7	196.86	53.98	1.65	1.65
3.0"×3/4"	76.2	19.05	196.86	53.98	1.65	1.65
3.0"×1.0"	76.2	25.4	196.86	53.98	1.65	1.65
3.0"×1.5"	76.2	38.1	196.86	53.98	1.65	1.65
3.0"×2.0"	76.2	50.8	196.86	53.98	1.65	1.65
3.0"×2.5"	76.2	63.5	196.86	53.98	1.65	1.65
4.0"×1/2"	101.6	12.7	241.3	66.68	2.11	1.65
4.0"×3/4"	101.6	19.05	241.3	66.68	2.11	1.65
4.0"×1.0"	101.6	25.4	241.3	66.68	2.11	1.65
4.0"×1.5"	101.6	38.1	241.3	66.68	2.11	1.65
4.0"×2.0"	101.6	50.8	241.3	66.68	2.11	1.65
4.0"×2.5"	101.6	63.5	241.3	66.68	2.11	1.65
4.0"×3.0"	101.6	76.2	241.3	66.68	2.11	1.65
6.0"×1/2"	152.4	12.7	361.96	92.08	2.77	1.65
6.0"×3/4"	152.4	19.05	361.96	92.08	2.77	1.65
6.0"×1.0"	152.4	25.4	361.96	92.08	2.77	1.65
6.0"×1.5"	152.4	38.1	361.96	92.08	2.77	1.65
6.0"×2.0"	152.4	50.8	361.96	92.08	2.77	1.65
6.0"×2.5"	152.4	63.5	361.96	92.08	2.77	1.65
6.0"×3.0"	152.4	76.2	361.96	92.08	2.77	1.65
6.0"×4.0"	152.4	101.6	361.96	95.25	2.77	2.11

DT-4.1.3-3 CLAMP CONCENTRIC REDUCER (DT-21)

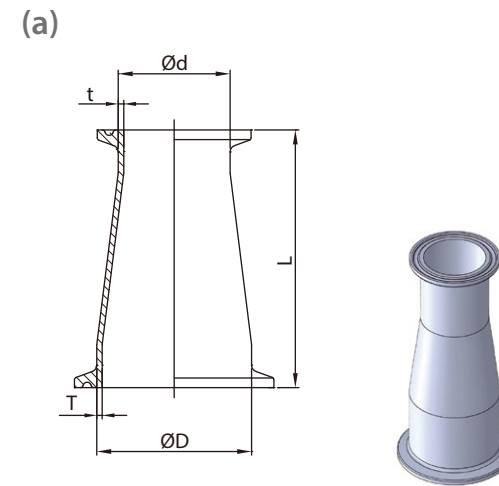


SIZE	ØD	Ød	L	T	t	L2
3/4"×1/2"	19.05	12.7	50.8	1.65	1.65	79.38
1"×1/2"	25.4	12.7	63.5	1.65	1.65	88.9
1"×3/4"	25.4	19.05	50.8	1.65	1.65	79.38
1.5"×3/4"	38.1	19.05	76.2	1.65	1.65	101.6
1.5"×1"	38.1	25.4	76.2	1.65	1.65	88.9
2"×1"	50.8	25.4	127	1.65	1.65	111.13
2"×1.5"	50.8	38.1	76.2	1.65	1.65	88.9
2.5"×1.5"	63.5	38.1	127	1.65	1.65	111.13
2.5"×2"	63.5	50.8	76.2	1.65	1.65	88.9
3"×1.5"	76.2	38.1	117.8	1.65	1.65	133.35
3"×2"	76.2	50.8	127	1.65	1.65	111.13
3"×2.5"	76.2	63.5	76.2	1.65	1.65	92.08
4"×2"	101.6	50.8	231.8	2.11	1.65	158.75
4"×2.5"	101.6	63.5	181	2.11	1.65	136.53
4"×3"	101.6	76.2	130.2	2.11	2.1	127
6"×3"	152.4	76.2	—	2.77	1.65	215.9
6"×4"	152.4	101.6	193.7	2.77	2.11	177.8

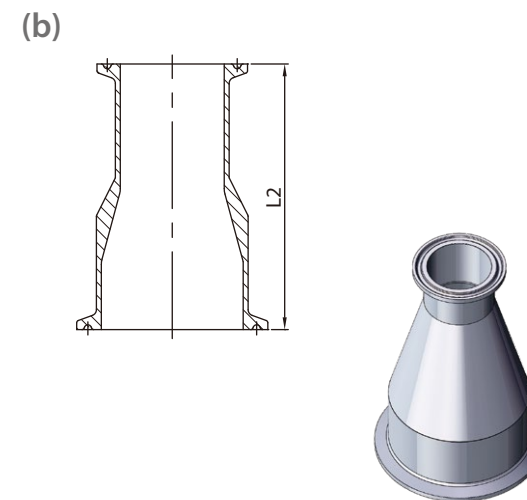

BPE Fittings


(a)

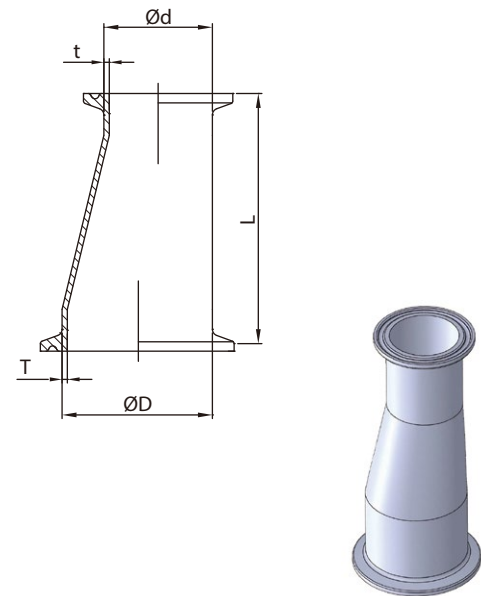

DT-4.1.3-3 CLAMP ECCENTRIC REDUCER (DT-21)


SIZE	ØD	Ød	L	T	t	L2
3/4"×1/2"	19.05	12.7	50.8	1.65	1.65	79.38
1"×1/2"	25.4	12.7	63.5	1.65	1.65	88.9
1"×3/4"	25.4	19.05	50.8	1.65	1.65	79.38
1.5"×3/4"	38.1	19.05	76.2	1.65	1.65	101.6
1.5"×1"	38.1	25.4	76.2	1.65	1.65	88.9
2"×1"	50.8	25.4	127	1.65	1.65	111.13
2"×1.5"	50.8	38.1	76.2	1.65	1.65	88.9
2.5"×1.5"	63.5	38.1	127	1.65	1.65	111.13
2.5"×2"	63.5	50.8	76.2	1.65	1.65	88.9
3"×1.5"	76.2	38.1	117.8	1.65	1.65	133.35
3"×2"	76.2	50.8	127	1.65	1.65	111.13
3"×2.5"	76.2	63.5	76.2	1.65	1.65	92.08
4"×2"	101.6	50.8	231.8	2.11	1.65	158.75
4"×2.5"	101.6	63.5	181	2.11	1.65	136.53
4"×3"	101.6	76.2	130.2	2.11	2.11	127
6"×3"	152.4	76.2	—	2.77	1.65	215.9
6"×4"	152.4	101.6	193.7	2.77	2.11	177.8

(b)

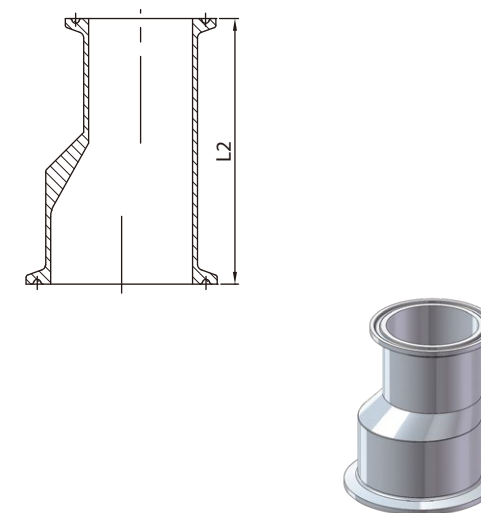

(Type A)

1/2"~1"

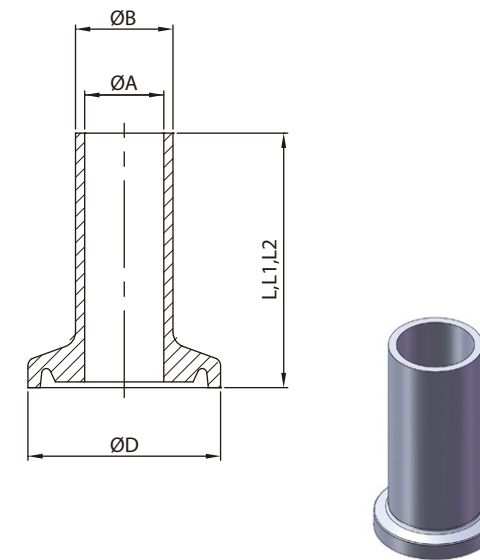


DT-4.1.4-1WELD FERRULE (DT-22)


TYPE	SIZE	ØA	ØB	ØD	L	L1	L2
A	1/4"	4.57	6.35	25	12.7	28.58	44.45
	3/8"	7.75	9.53	25	12.7	28.58	44.45
	1/2"	9.4	12.7	25	12.7	28.58	44.45
	3/4"	15.75	19.05	25	12.7	28.58	44.45
	1.0"	22.1	25.4	34	12.7	28.58	44.45
B	1.0"	22.1	25.4	50.39	12.7	28.58	44.45
	1.5"	34.8	38.1	50.39	12.7	28.58	44.45
	2.0"	47.5	50.8	63.91	12.7	28.58	57.15
	2.5"	60.2	63.5	77.39	12.7	28.58	57.15
	3.0"	72.9	76.2	90.91	12.7	28.58	57.15
	4.0"	97.38	101.6	118.92	15.88	28.58	57.15
	6.0"	146.86	152.4	166.88	19.05	38.1	76.2

(Type B)

1"~6"

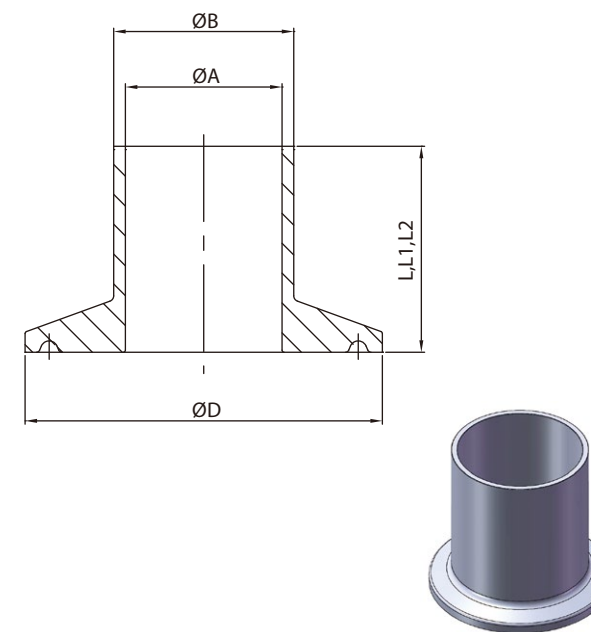


BPE Fittings

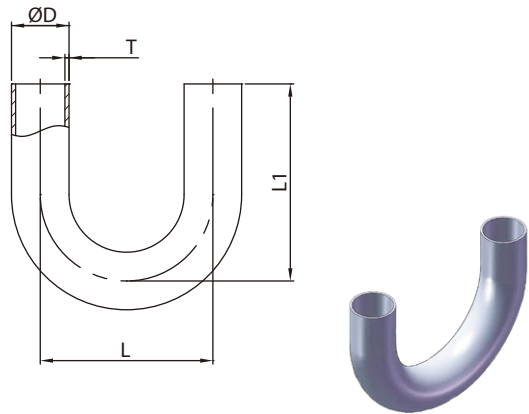


DT-4.1.1-7 180° WELD ELBOW (DT-23)

SIZE	ØD	L	L1	T
1/2"	12.7	114.3	76.2	1.65
3/4"	19.05	114.3	76.2	1.65
1"	25.4	76.2	76.2	1.65
1.5"	38.1	114.3	114.3	1.65
2"	50.8	152.4	127	1.65
2.5"	63.5	190.5	146.05	1.65
3"	76.2	228.6	165.1	1.65
4"	101.6	304.8	215.9	2.11
6"	152.4	457.2	292.1	2.77

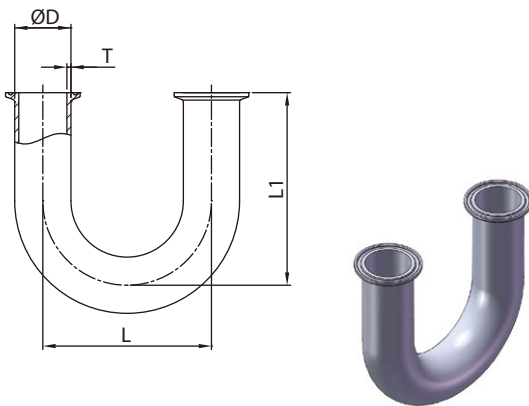


DT-4.1.1-8 180° CLAMP ELBOW (DT-24)

SIZE	ØD	L	L1	T
1/2"	12.7	114.3	88.9	1.65
3/4"	19.05	114.3	88.9	1.65
1"	25.4	76.2	88.9	1.65
1.5"	38.1	114.3	127	1.65
2"	50.8	152.4	139.7	1.65
2.5"	63.5	190.5	158.78	1.65
3"	76.2	228.6	177.8	1.65
4"	101.6	304.8	231.78	2.11
6"	152.4	457.2	330.2	2.77

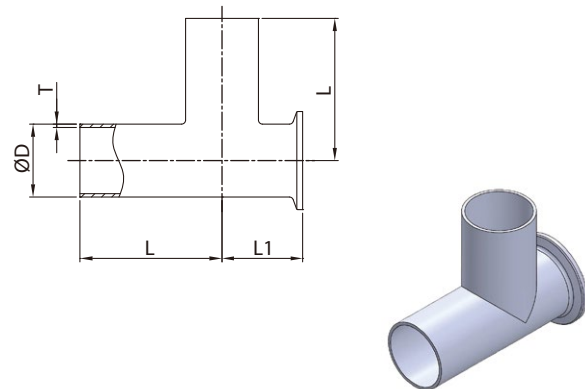


DT-4.1.2-3 SHORT OUTLET RUN WELD/CLAMP TEE (DT-25)

SIZE	ØD	L	L1	T
1/2"	12.7	47.63	22.23	1.65
3/4"	19.05	50.8	25.4	1.65
1"	25.4	53.98	28.58	1.65
1.5"	38.1	60.33	34.93	1.65
2"	50.8	73.03	41.28	1.65
2.5"	63.5	79.38	47.63	1.65
3"	76.2	85.73	53.98	1.65
4"	101.6	104.78	69.85	2.11
6"	152.4	142.88	117.48	2.77

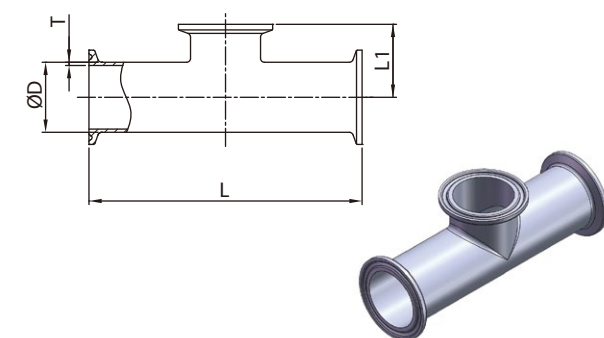


DT-4.1.2-5 SHORT OUTLET TEE CLAMP END (DT-27)

SIZE	ØD	L	L1	T
1/2"	12.7	114.3	25.4	1.65
3/4"	19.05	120.66	28.58	1.65
1"	25.4	133.36	28.58	1.65
1.5"	38.1	146.06	34.93	1.65
2"	50.8	171.46	41.28	1.65
2.5"	63.5	184.16	47.63	1.65
3"	76.2	196.86	53.98	1.65
4"	101.6	241.3	69.85	2.11
6"	152.4	361.96	117.48	2.77

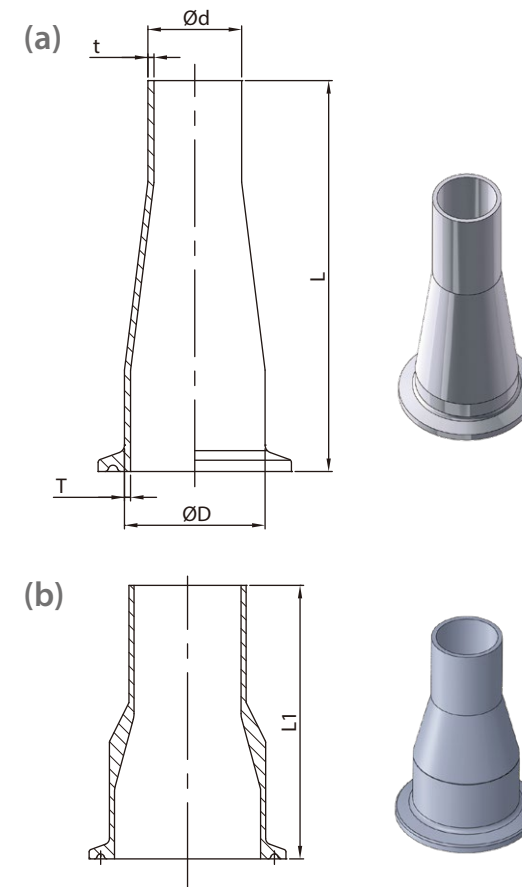

DT-4.1.3-2AC CONCENTRIC REDUCER (DT-26)

SIZE	ØD	Ød	T	t	L	L1
3/4"×1/2"	19.05	12.7	1.65	1.65	76.2	66.68
1"×1/2"	25.4	12.7	1.65	1.65	88.9	76.2
1"×3/4"	25.4	19.05	1.65	1.65	76.2	66.68
1.5"×3/4"	38.1	19.05	1.65	1.65	101.6	88.9
1.5"×1"	38.1	25.4	1.65	1.65	101.6	76.2
2"×1"	50.8	25.4	1.65	1.65	152.4	98.43
2"×1.5"	50.8	38.1	1.65	1.65	101.6	76.2
2.5"×1.5"	63.5	38.1	1.65	1.65	152.4	98.43
2.5"×2"	63.5	50.8	1.65	1.65	107.9	76.2
3"×1.5"	76.2	38.1	1.65	1.65	203.2	120.65
3"×2"	76.2	50.8	1.65	1.65	158.8	98.43
3"×2.5"	76.2	63.5	1.65	1.65	108	79.38
4"×2"	101.6	50.8	2.11	1.65	263.5	146.05
4"×2.5"	101.6	63.5	2.11	1.65	212.7	123.83
4"×3"	101.6	76.2	2.11	1.65	161.9	114.3
6"×3"	152.4	76.2	2.77	2.77	228.6	203.2
6"×4"	152.4	101.6	2.77	2.77	228.6	161.93

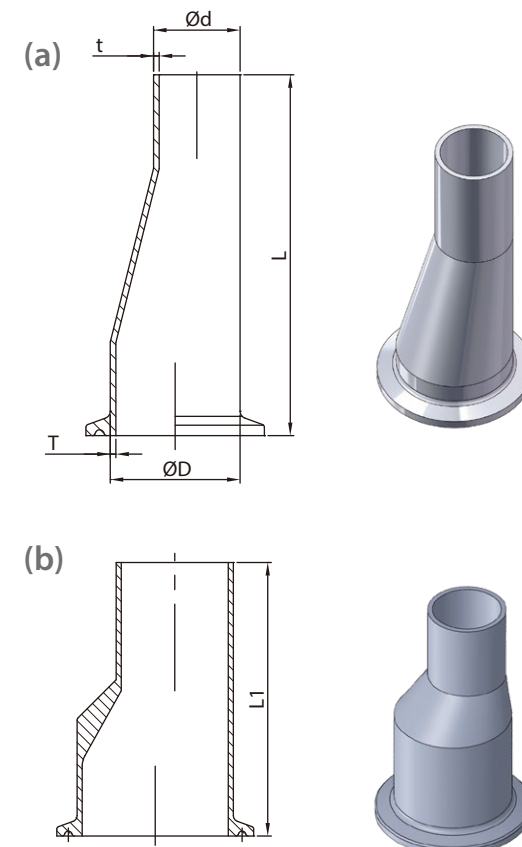


DT-4.1.3-2AE ECCENTRIC REDUCER (DT-26)


SIZE	ØD	Ød	T	t	L	L1
3/4"×1/2"	19.05	12.7	1.65	1.65	76.2	66.68
1"×1/2"	25.4	12.7	1.65	1.65	88.9	76.2
1"×3/4"	25.4	19.05	1.65	1.65	76.2	66.68
1.5"×3/4"	38.1	19.05	1.65	1.65	101.6	88.9
1.5"×1"	38.1	25.4	1.65	1.65	101.6	76.2
2"×1"	50.8	25.4	1.65	1.65	152.4	98.43
2"×1.5"	50.8	38.1	1.65	1.65	101.6	76.2
2.5"×1.5"	63.5	38.1	1.65	1.65	152.4	98.43
2.5"×2"	63.5	50.8	1.65	1.65	107.9	76.2
3"×1.5"	76.2	38.1	1.65	1.65	203.2	120.65
3"×2"	76.2	50.8	1.65	1.65	158.8	98.43
3"×2.5"	76.2	63.5	1.65	1.65	108	79.38
4"×2"	101.6	50.8	2.11	1.65	263.5	146.05
4"×2.5"	101.6	63.5	2.11	1.65	212.7	123.83
4"×3"	101.6	76.2	2.11	1.65	161.9	114.3
6"×3"	152.4	76.2	2.77	1.65	222.3	203.2
6"×4"	152.4	101.6	2.77	2.11	228.6	161.93

BPE Fittings

DT-4.1.2-10 (DT-28)

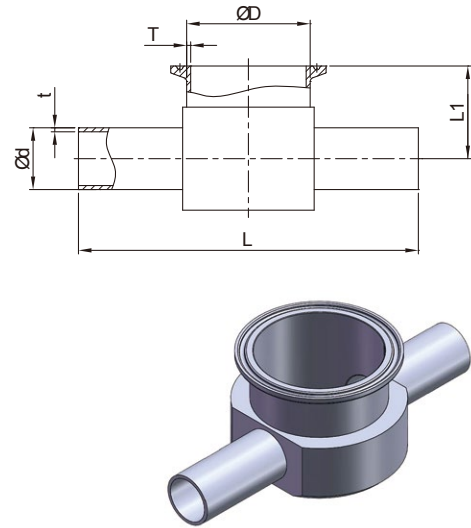


DT-4.1.2-11 (DT-29)

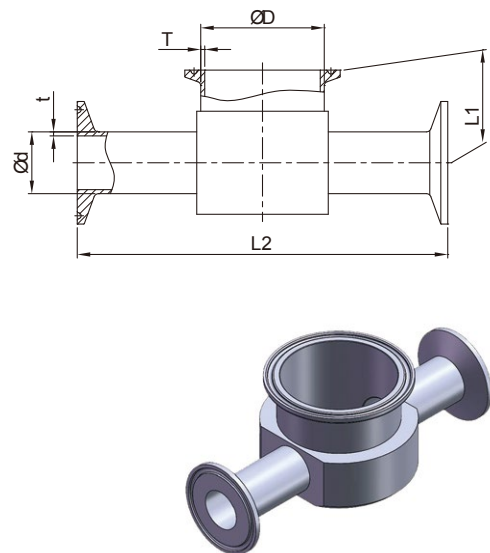

INSTRUMENT TEE WELD/CLAMP END


SIZE	ØD	Ød	L	L1	L2	T	t
1.5"×1/2"	38.1	12.7	127	22.23	152.4	1.65	1.65
1.5"×3/4"	38.1	19.05	127	25.4	152.4	1.65	1.65
1.5"×1"	38.1	25.4	127	28.58	152.4	1.65	1.65
2"×1/2"	50.8	12.7	139.7	25.4	165.1	1.65	1.65
2"×3/4"	50.8	19.05	139.7	28.58	165.1	1.65	1.65
2"×1"	50.8	25.4	139.7	31.75	165.1	1.65	1.65
2"×1.5"	50.8	38.1	139.7	38.1	165.1	1.65	1.65
2.5"×1/2"	63.5	12.7	170	35	195.4	1.65	1.65
2.5"×3/4"	63.5	19.05	170	38.1	195.4	1.65	1.65
2.5"×1"	63.5	25.4	170	41.3	195.4	1.65	1.65
2.5"×1.5"	63.5	38.1	170	44.5	195.4	1.65	1.65
2.5"×2"	63.5	50.8	170	48	195.4	1.65	1.65
3"×1/2"	76.2	12.7	180	38.1	205.4	1.65	1.65
3"×3/4"	76.2	19.05	180	41.3	205.4	1.65	1.65
3"×1"	76.2	25.4	180	44.5	205.4	1.65	1.65
3"×1.5"	76.2	38.1	180	48	205.4	1.65	1.65
3"×2"	76.2	50.8	180	50.8	205.4	1.65	1.65
3"×2.5"	76.2	63.5	180	54	205.4	1.65	1.65
4"×1/2"	101.6	12.7	220	79.4	245.4	1.65	1.65
4"×3/4"	101.6	19.05	220	82.6	245.4	1.65	1.65
4"×1"	101.6	25.4	220	85.7	245.4	2.11	1.65
4"×1.5"	101.6	38.1	220	88.9	245.4	2.11	1.65
4"×2"	101.6	50.8	220	95.2	245.4	2.11	1.65
4"×2.5"	101.6	63.5	220	98.4	245.4	2.11	1.65
4"×3"	101.6	76.2	220	101.6	245.4	2.11	1.65

DT-4.1.5-1 AUTOMATIC TUBE WELD CAP(DT-30)

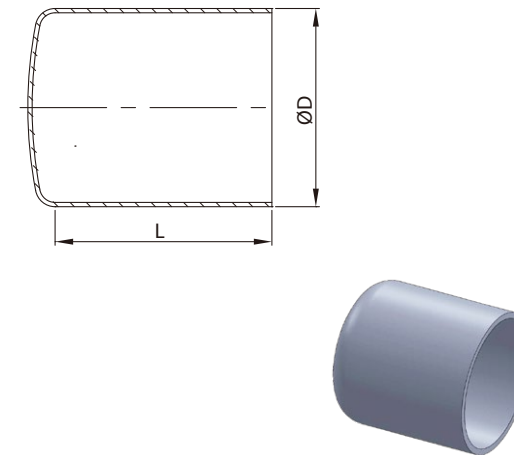


SIZE	ØD	L
1/2"	12.7	38.1
3/4"	19.05	38.1
1.0"	25.4	38.1
1.5"	38.1	38.1
2.0"	50.8	38.1
2.5"	63.5	38.1
3.0"	76.2	44.45
4.0"	101.6	50.8
6.0"	152.4	63.5

DT-4.1.5-2 SOLID END CAP HYGIENIC CLAMP JOINT(DT-31)

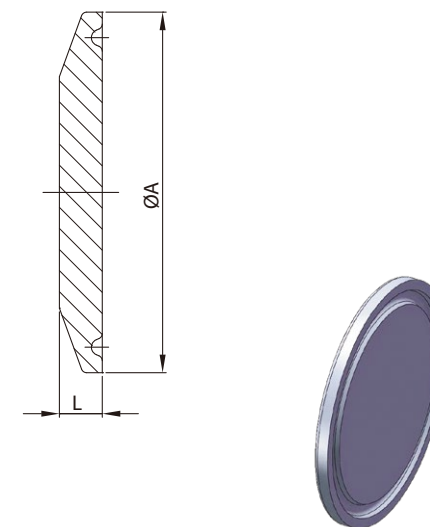


SIZE	ØD	L
1/4"	25	4.75
3/8"	25	4.75
1/2"	25	4.75
3/4"	25	4.75
1.0"	34/50.39	6.35
1.5"	50.39	6.35
2.0"	63.91	6.35
2.5"	77.39	6.35
3.0"	90.91	6.35
4.0"	118.92	7.92
6.0"	166.88	11.1

Heavy Duty Clamp-Ring

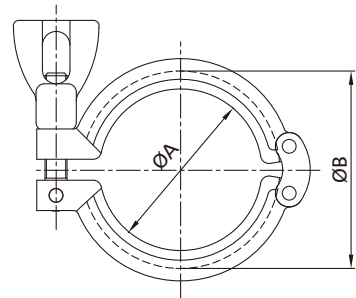


13SF HEAVY DUTY DOUBLE PIN CLAMP

SIZE	ØA	ØB
1/2"~3/4"	20	28
A37	27.5	42.9
1"~1.5"	45	53.6
2"	59	72
2.5"	67	84
3"	85	98
4"	114	127
6"	158	178
8"	210	227
10"	262	278

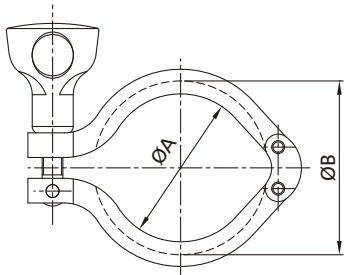


13MHM DOUBLE PIN CLAMP

SIZE	ØA	ØB
1/2"~3/4"	20	28
A37	28	38
1"~1.5"	43.6	53.6
2"	57	67
2.5"	70.6	80.6
3"	84	94
4"	112	122
6"	155	170
8"	205	220.8

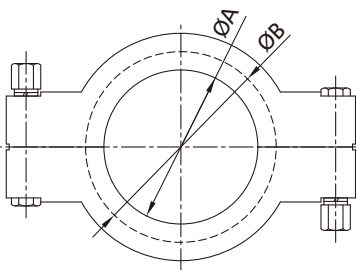

13MHP
HIGH PRESSURE BOLTED CLAMP

SIZE	ØA	ØB
1/2"~3/4"	20	28
1"~1.5"	43.32	52
2"	56.44	65.5
2.5"	69.54	79
3"	77.56	92.5
4"	108.86	120.5
6"	158	170
6.5"	173	186.2
8"	205	220.8
10"	258.2	276.8
12"	309	327.6

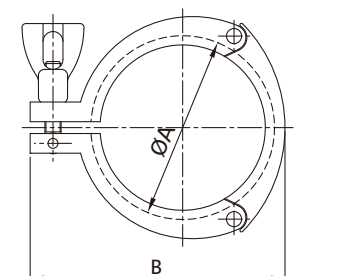


13MHHS
3 PIECE CLAMP

SIZE	ØA	B
1"~1.5"	54	80
2"	67.5	94
2.5"	80.9	109
3"	84.4	126
4"	122.4	154


Ferrule Seal

13PG

1/2", 3/4"~1" (A37)



1"~8"
DN10~DN200





13PG (EPDM、SILICONE、VITON、PTFE、FKM)


Imperial	ØA	ØB
1/2"	9.9	21.8
3/4"	16.3	21.8
A37	19	33
1"	22.7	50
1.25"	29.5	50.5
1.5"	35.9	50
2"	48.6	63.5
2.5"	61.3	76.2
3"	74	88.9
3.5"	86	105
4"	98.6	118
4.5"	110.5	129
5"	134.7	153
6"	147.8	165
8"	198.6	216

ISO(PTFE)	ØA	ØB	DIN(EPDM)	ØA	ØB
DN8	11.1	33.2	DN10	9.8	33.2
DN12	14.8	33.2	DN15	15.8	33.2
DN15	18.9	33.2	DN20	19.8	33.2
DN20	24.5	49.7	DN28	25.8	49.7
DN25	31.3	49.7	DN34	31.8	49.7
DN32	40	49.7	DN40	37.8	49.7
DN40	45.9	63.2	DN52	49.8	63.2
DN50	57.1	76.7	DN70	66.8	90.2
DN65	72.9	90.2	DN85	81.8	105.2
DN80	85.7	105.2	DN101.6	98.4	118.2
DN100	109.9	129.2	DN104	100.8	118.2
DN125	134.5	154.2	DN125	125.8	154.2
DN150	163.1	182.2	DN150	150.8	182.2
DN200	211.9	232.7	DN200	200.8	232.7

13PG(EPDM+ PTFE)




1.0"~4.0"



Imperial 13PG(EPDM+ PTFE)

SIZE	ØA	ØB
1/2"	10	21.5
3/4"	16.3	21.8
1"	22.5	50.2
1.5"	34.9	50.2
2"	47.6	63.5
2.5"	60.5	77.7
3"	73.2	90.5
4"	97.7	118.4

13FG



FLANGE TYPE 13FG

SIZE	ØA	ØB
1"	22.8	52.7
1.5"	35.8	52.7
2"	48.8	66.2
2.5"	60.5	79.7
3"	73.1	93.2
4"	97.8	121.2
6"	148	169.1
8"	217.9	220.1
10"	249	270.7
12"	300	321.5