


Diaphragm Valve

Forged/Casting/Block

ASTM 316L/1.4404/1.4435

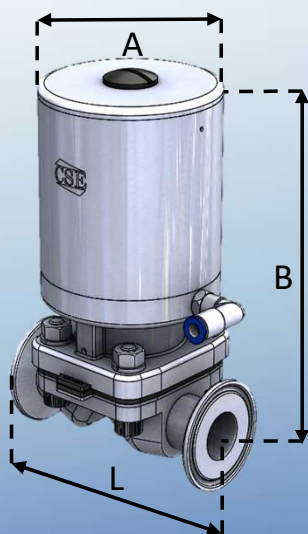

Type: Manual- Nylon/SS304 handle
Pneumatic- Nylon /SS304 actuator
Size: ½" – 2"
Configurations: 2 Way / 3 Way / Multi-port (Block)
Contact Type: Clamp /Weld / Male
Surface : SF1 Manual polish / SF4 Electrolytic polish

SIZE	A	B	L (Clamp End)	L1 (weld End)
½"	72	108.1	88.9	124
¾"	72	108.7	101.6	135
1"	85	150.5	114.3	141.2
1 ½"	114.3	178.8	139.7	168.4
2"	161	24.1	158.8	190.5

Diaphragm Valve



AS-I Control Top

Heat-Resistant Diaphragm



Feature

Compact & sturdy design

With SS304 body shape and High-performance spring steel

Purity sanitary out-shape

Smooth appearance design without any dead angels and dead gap

Quick link IOT control Top

Available to link IOT (AS-i) control Top For a Smart Manufacturing

Stable performance

Approval with 3A Certification & Passing the strict life cycle time test

Custom design service

With 1.4404 & 1.4435 & Hastelloy options and multi-axis machining capacity

